




6AJxx(C)AH Series 600W Transient Voltage Suppressor

Rev.1.1

DESCRIPTION:

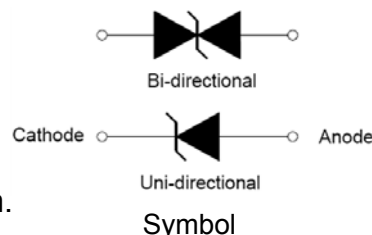
TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.



SMA

FEATURES:

- ✧ Low profile package.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ 600W peak pulse power capability at 10/1000μs waveform.
- ✧ Typical I_R less than 1μA above 10V.
- ✧ Fast response time: typically less than 1.0ps from 0V to V_{BR} min.
- ✧ High temperature to reflow soldering: 260°C/40s at terminals.
- ✧ Plastic package has underwriters laboratory flammability 94V-0.
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C.
- ✧ Terminal: solder plated, solderable per J-STD-002.
- ✧ For surface mounted applications in order to optimize board space.
- ✧ High reliability application and automotive grade (AEC-Q101 qualified).



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage and operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Peak pulse power dissipation at 10/1000μs waveform	P_{PP}	600	W
Steady state power dissipation at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	5.0	W
Maximum instantaneous forward voltage at 50A for unidirectional	V_F	5.0	V
Peak forward surge current, 8.3ms single half sine wave(Note 1)	I_{FSM}	60	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	30	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	120	°C/W

Notes:

1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

MARKING



AX: Device Marking Code
1928: the 28th week, 2019

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)

Part Number		Marking		V_R	$I_{R@V_R}$	$V_{BR@I_T}$		I_T	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-Polar	Bi-Polar	Uni	Bi	V	max(μA)	min(V)	max(V)	mA	max(V)	A
6AJ10AH	6AJ10CAH	KX	AX	10.0	2	11.10	12.30	1	17.0	35.3
6AJ11AH	6AJ11CAH	KZ	AZ	11.0	1	12.20	13.50	1	18.2	33.0
6AJ12AH	6AJ12CAH	LE	BE	12.0	1	13.30	14.70	1	19.9	30.2
6AJ13AH	6AJ13CAH	LG	BG	13.0	1	14.40	15.90	1	21.5	27.9
6AJ14AH	6AJ14CAH	LK	BK	14.0	1	15.60	17.20	1	23.2	25.9
6AJ15AH	6AJ15CAH	LM	BM	15.0	1	16.70	18.50	1	24.4	24.6
6AJ16AH	6AJ16CAH	LP	BP	16.0	1	17.80	19.70	1	26.0	23.1
6AJ17AH	6AJ17CAH	LR	BR	17.0	1	18.90	20.90	1	27.6	21.8
6AJ18AH	6AJ18CAH	LT	BT	18.0	1	20.00	22.10	1	29.2	20.6
6AJ20AH	6AJ20CAH	LV	BV	20.0	1	22.20	24.50	1	32.4	18.6
6AJ22AH	6AJ22CAH	LX	BX	22.0	1	24.40	26.90	1	35.5	16.9
6AJ24AH	6AJ24CAH	LZ	BZ	24.0	1	26.70	29.50	1	38.9	15.4
6AJ26AH	6AJ26CAH	ME	CE	26.0	1	28.90	31.90	1	42.1	14.3
6AJ28AH	6AJ28CAH	MG	CG	28.0	1	31.10	34.40	1	45.4	13.2
6AJ30AH	6AJ30CAH	MK	CK	30.0	1	33.30	36.80	1	48.4	12.4
6AJ33AH	6AJ33CAH	MM	CM	33.0	1	36.70	40.60	1	53.3	11.3
6AJ36AH	6AJ36CAH	MP	CP	36.0	1	40.00	44.20	1	58.1	10.4
6AJ40AH	6AJ40CAH	MR	CR	40.0	1	44.40	49.10	1	64.5	9.3
6AJ43AH	6AJ43CAH	MT	CT	43.0	1	47.80	52.80	1	69.4	8.7
6AJ45AH	6AJ45CAH	MV	CV	45.0	1	50.00	55.30	1	72.7	8.3
6AJ48AH	6AJ48CAH	MX	CX	48.0	1	53.30	58.90	1	77.4	7.8

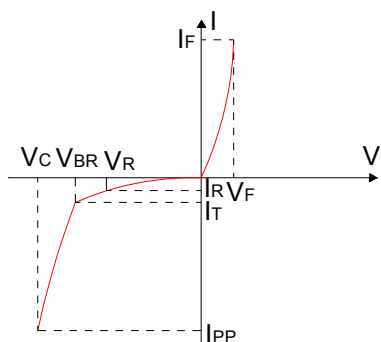
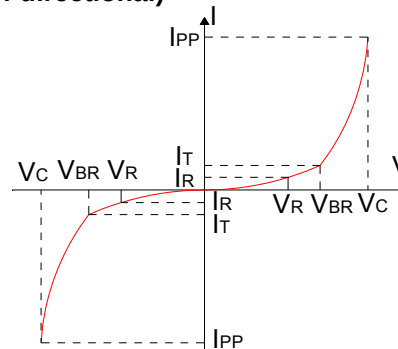
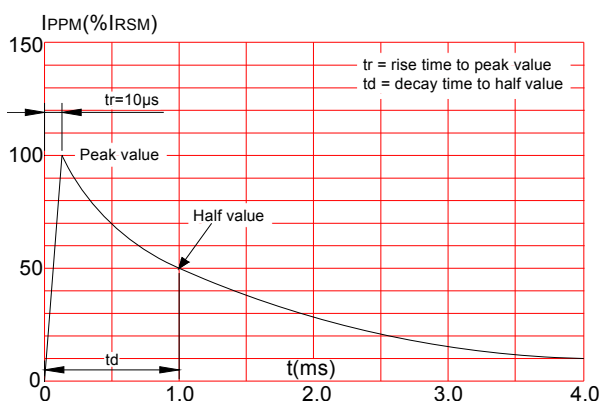
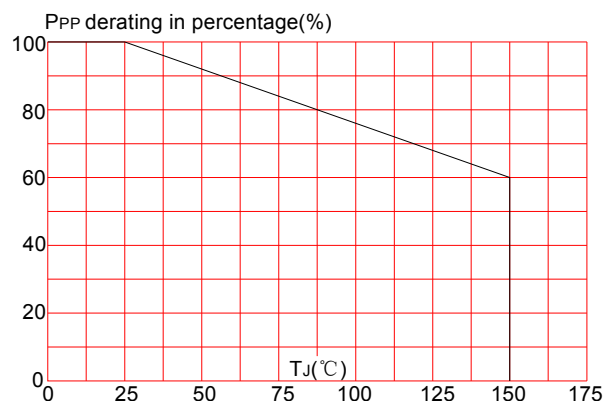
ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, continued)

Part Number		Marking		V_R	$I_R@V_R$	$V_{BR}@I_T$		I_T	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-polar	Bi-polar	Uni	Bi	V	max(μA)	min(V)	max(V)	mA	V	A
6AJ51AH	6AJ51CAH	MZ	CZ	51.0	1	56.70	62.70	1	82.4	7.3
6AJ54AH	6AJ54CAH	NE	DE	54.0	1	60.00	66.30	1	87.1	6.9
6AJ58AH	6AJ58CAH	NG	DG	58.0	1	64.40	71.20	1	93.6	6.4
6AJ60AH	6AJ60CAH	NK	DK	60.0	1	66.70	73.70	1	96.8	6.2
6AJ64AH	6AJ64CAH	NM	DM	64.0	1	71.10	78.60	1	103.0	5.8
6AJ70AH	6AJ70CAH	NP	DP	70.0	1	77.80	86.00	1	113.0	5.3
6AJ75AH	6AJ75CAH	NR	DR	75.0	1	83.30	92.10	1	121.0	5.0
6AJ78AH	6AJ78CAH	NT	DT	78.0	1	86.70	95.80	1	126.0	4.8
6AJ85AH	6AJ85CAH	NV	DV	85.0	1	94.4	104.0	1	137.0	4.4
6AJ100AH	6AJ100CAH	NZ	DZ	100.0	1	111.0	123.0	1	162.0	3.7
6AJ110AH	6AJ110CAH	PE	EE	110.0	1	122.0	135.0	1	177.0	3.4
6AJ120AH	6AJ120CAH	PG	EG	120.0	1	133.0	147.0	1	193.0	3.1

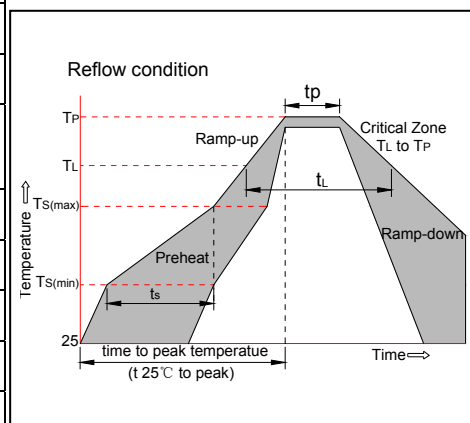
① Surge waveform: 10/1000 μs V_R : Stand-off voltage -- Maximum voltage that can be applied V_{BR} : Breakdown voltage V_C : Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP} I_R : Reverse leakage current**ORDERING INFORMATION**

6AJ	xx	C	A	H
600W SMA Series	V_R Voltage	C:Bi-directional	5% V_{BR} Voltage tolerance	For AEC-Q101

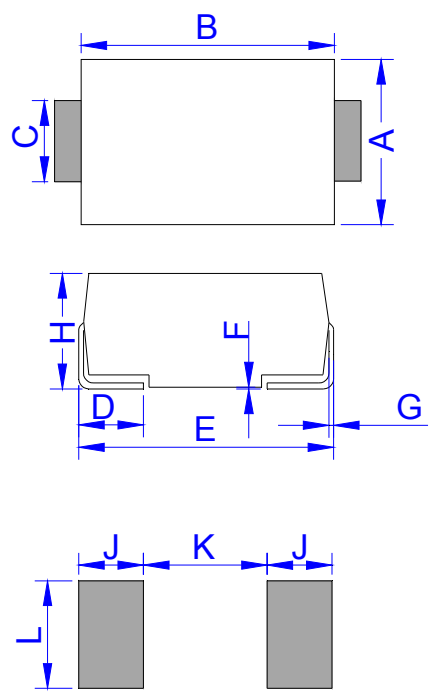
RATINGS AND V-I CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

FIG.1:V- I curve characteristics
(Uni-directional)

FIG.2:V- I curve characteristics
(Bi-directional)

FIG.3: Pulse waveform

FIG.4: Pulse derating curve

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_P)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C



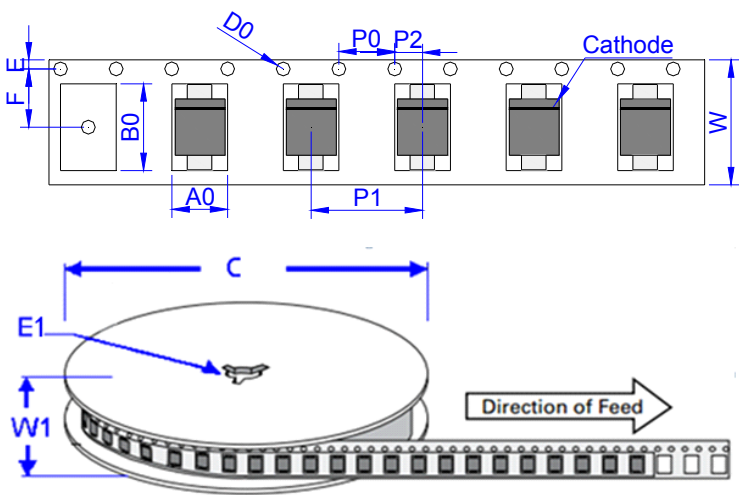
PACKAGE MECHANICAL DATA



DO-214AC (SMA)

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.60	3.00	0.102	0.118
B	4.15	4.65	0.163	0.183
C	1.25	1.65	0.049	0.065
D	0.95	1.52	0.037	0.060
E	4.90	5.30	0.193	0.209
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.00	2.44	0.079	0.096
J	2.00		0.079	
K		2.30		0.091
L	1.80		0.071	

TAPE AND REEL SPECIFICATION-SMA



Ref.	Dimensions	
	Millimeters	Inches
A0	2.79 ± 0.3	0.110 ± 0.012
B0	5.33 ± 0.3	0.210 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	5.5 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.472 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079

PART No.	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
6AJxxAH/CAH	0.068	7,500	120,000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.1st version which is made in 9-July-2021. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.