



SMCJxxAH、SMCJxxCAH Series 1500W TVS


Rev.3.1

DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

FEATURES:


- ✧ Low profile package.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ 1500W peak pulse power capability at 10/1000 μ s waveform.
- ✧ Typical I_R less than 1 μ A.
- ✧ Fast response time: typically less than 1.0ps from 0V to V_{BR} min.
- ✧ High temperature reflow soldering: 260 $^{\circ}$ C/40s at terminals.
- ✧ Plastic package has underwriters laboratory flammability 94V-0.
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of 260 $^{\circ}$ C.
- ✧ Terminal: solder plated, solderable per J-STD-002.
- ✧ For surface mounted applications in order to optimize board space.
- ✧ High reliability application and automotive grade (AEC-Q101 qualified).



SMC



Bi-directional



Uni-direction

Symbol


ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}$ C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage and operating junction temperature range	T_{STG}/T_J	-55 to +150	$^{\circ}$ C
Power dissipation on infinite heatsink at $T_L=75^{\circ}$ C	$P_{M(AV)}$	6.5	W
Peak pulse power dissipation at 10/1000 μ s waveform	P_{PP}	1500	W
Maximum instantaneous forward voltage at 100A for unidirectional	V_F	5.0	V
Peak forward surge current, 8.3ms single half sine wave (Note 1)	I_{FSM}	200	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	15	$^{\circ}$ C/W
Typical thermal resistance Junction to ambient	$R_{\theta JA}$	75	$^{\circ}$ C/W

Notes:

1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

MARKING

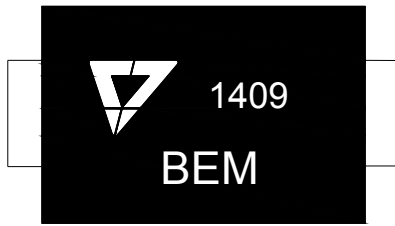

BEM: Device Marking Code
1409: In ninth week, 2014

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Part Number		Marking		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	Uni	Bi	V	max(μA)	min(V)	max(V)	mA	max(V)	A
SMCJ15AH	SMCJ15CAH	GEM	BEM	15	1	16.70	18.50	1	24.4	61.5
SMCJ16AH	SMCJ16CAH	GEP	BEP	16	1	17.80	19.70	1	26.0	57.7
SMCJ17AH	SMCJ17CAH	GER	BER	17	1	18.90	20.90	1	27.6	54.4
SMCJ18AH	SMCJ18CAH	GET	BET	18	1	20.00	22.10	1	29.2	51.4
SMCJ20AH	SMCJ20CAH	GEV	BEV	20	1	22.20	24.50	1	32.4	46.3
SMCJ22AH	SMCJ22CAH	GEX	BEX	22	1	24.40	26.90	1	35.5	42.3
SMCJ24AH	SMCJ24CAH	GEZ	BEZ	24	1	26.70	29.50	1	38.9	38.6
SMCJ26AH	SMCJ26CAH	GFE	BFE	26	1	28.90	31.90	1	42.1	35.6
SMCJ28AH	SMCJ28CAH	GFG	BFG	28	1	31.10	34.40	1	45.4	33.1
SMCJ30AH	SMCJ30CAH	GFK	BFK	30	1	33.30	36.80	1	48.4	31.0
SMCJ33AH	SMCJ33CAH	GFM	BFM	33	1	36.70	40.60	1	53.3	28.2
SMCJ36AH	SMCJ36CAH	GFP	BFP	36	1	40.00	44.20	1	58.1	25.8
SMCJ40AH	SMCJ40CAH	GFR	BFR	40	1	44.40	49.10	1	64.5	23.3
SMCJ43AH	SMCJ43CAH	GFT	BFT	43	1	47.80	52.80	1	69.4	21.6
SMCJ45AH	SMCJ45CAH	GFV	BFV	45	1	50.00	55.30	1	72.7	20.6
SMCJ48AH	SMCJ48CAH	GFX	BFX	48	1	53.30	58.90	1	77.4	19.4
SMCJ51AH	SMCJ51CAH	GFZ	BFZ	51	1	56.70	62.70	1	82.4	18.2
SMCJ54AH	SMCJ54CAH	GGE	BGE	54	1	60.00	66.30	1	87.1	17.2
SMCJ58AH	SMCJ58CAH	GGG	BGG	58	1	64.40	71.20	1	93.6	16.1
SMCJ60AH	SMCJ60CAH	GGK	BGK	60	1	66.70	73.70	1	96.8	15.5
SMCJ64AH	SMCJ64CAH	GGM	BGM	64	1	71.10	78.60	1	103.0	14.6
SMCJ70AH	SMCJ70CAH	GGP	BGP	70	1	77.80	86.00	1	113.0	13.3
SMCJ75AH	SMCJ75CAH	GGR	BGR	75	1	83.30	92.10	1	121.0	12.4

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, continued)

Part Number		Marking		V_R	$I_R@V_R$	$V_{BR}@I_T$		I_T	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-Polar	Bi-Polar	Uni	Bi	V	max(μA)	min(V)	max(V)	mA	max(V)	A
SMCJ78AH	SMCJ78CAH	GGT	BGT	78	1	86.70	95.80	1	126.0	11.9
SMCJ85AH	SMCJ85CAH	GGV	BGV	85	1	94.40	104.0	1	137.0	11.0
SMCJ90AH	SMCJ90CAH	GGX	BGX	90	1	100.0	111.0	1	146.0	10.3
SMCJ100AH	SMCJ100CAH	GGZ	BGZ	100	1	111.0	123.0	1	162.0	9.3
SMCJ110AH	SMCJ110CAH	GHE	BHE	110	1	122.0	135.0	1	177.0	8.5
SMCJ120AH	SMCJ120CAH	GHG	BHG	120	1	133.0	147.0	1	193.0	7.8
SMCJ130AH	SMCJ130CAH	GHK	BHK	130	1	144.0	159.0	1	209.0	7.2
SMCJ150AH	SMCJ150CAH	GHM	BHM	150	1	167.0	185.0	1	243.0	6.2
SMCJ160AH	SMCJ160CAH	GHP	BHP	160	1	178.0	197.0	1	259.0	5.8
SMCJ170AH	SMCJ170CAH	GHR	BHR	170	1	189.0	209.0	1	275.0	5.5
SMCJ180AH	SMCJ180CAH	GHT	BHT	180	1	201.0	222.0	1	292.0	5.2
SMCJ190AH	SMCJ190CAH	GHU	BHU	190	1	211.0	234.0	1	307.0	4.9
SMCJ200AH	SMCJ200CAH	GHV	BHV	200	1	224.0	247.0	1	324.0	4.7
SMCJ210AH	SMCJ210CAH	GHW	BHW	210	1	233.0	258.0	1	337.0	4.5
SMCJ220AH	SMCJ220CAH	GHX	BHX	220	1	246.0	272.0	1	356.0	4.2
SMCJ250AH	SMCJ250CAH	GJG	BJG	250	1	279.0	309.0	1	405.0	3.7
SMCJ300AH	SMCJ300CAH	GJK	BJK	300	1	335.0	371.0	1	486.0	3.1
SMCJ350AH	SMCJ350CAH	GJM	BJM	350	1	391.0	432.0	1	567.0	2.7
SMCJ400AH	SMCJ400CAH	GJP	BJP	400	1	447.0	494.0	1	648.0	2.3
SMCJ440AH	SMCJ440CAH	GJR	BJR	440	1	492.0	543.0	1	713.0	2.1

① Surge waveform: 10/1000 μs V_R : Stand-off voltage -- maximum voltage that can be applied V_{BR} : Breakdown voltage V_C : Clamping voltage -- peak voltage measured across the suppressor at a specified I_{PP} I_R : Reverse leakage current

ORDERING INFORMATION

SMCJ	xx	C	A	H
1500W SMC Series	V_R Voltage	C: Bi-directional	5% V_{BR} Voltage tolerance	For AEC-Q101

RATINGS AND V-I CHARACTERISTICS CURVES (T_A=25°C, unless otherwise noted)

FIG.1:V- I curve characteristics (Uni-directional)

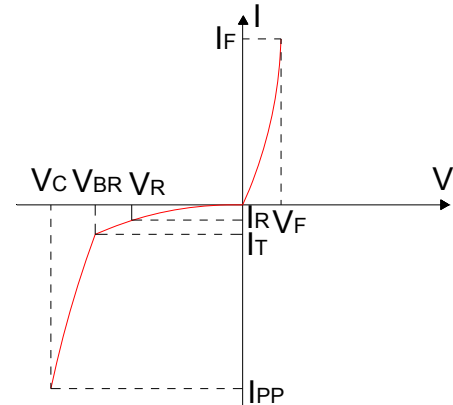


FIG.2:V- I curve characteristics (Bi-directional)

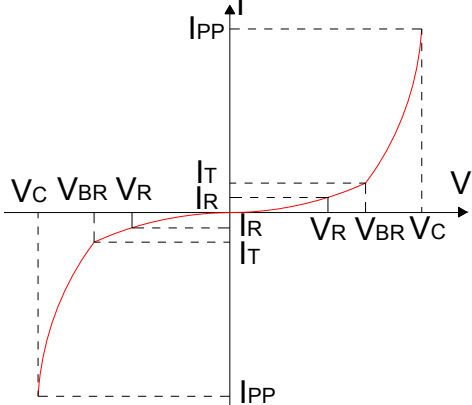


FIG.3: Pulse waveform

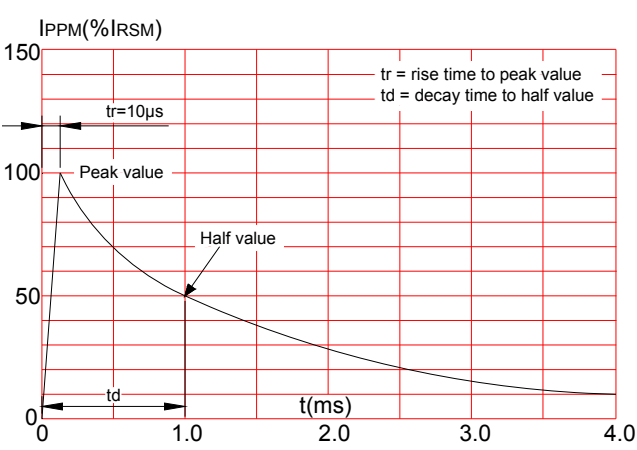


FIG.4: Pulse derating curve



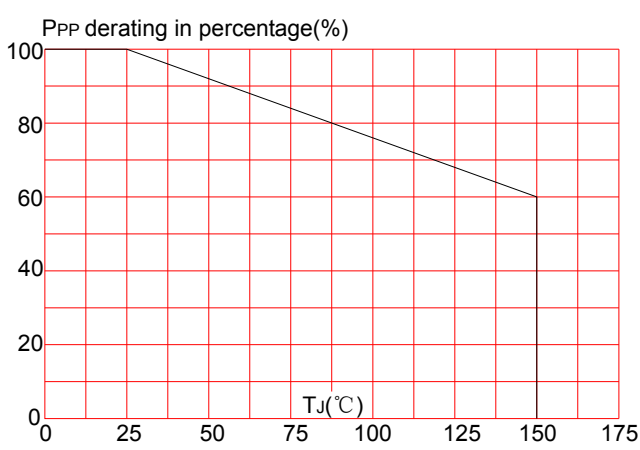


FIG.5: Peak pulse power dissipation vs. pulse width

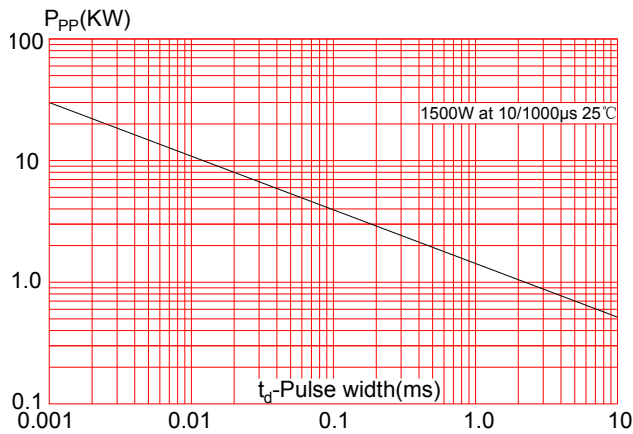


SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

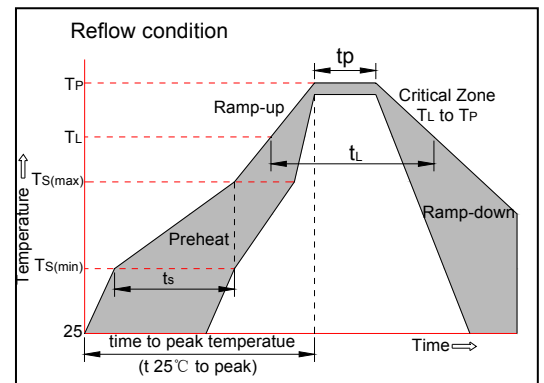


PACKAGE MECHANICAL DATA

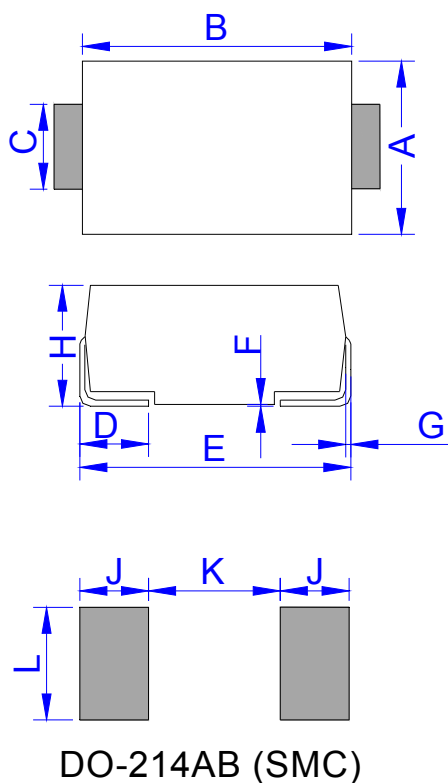

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.75	6.25	0.226	0.246
B	6.90	7.40	0.272	0.291
C	2.75	3.25	0.108	0.128
D	0.95	1.52	0.037	0.060
E	7.70	8.20	0.303	0.323
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.15	2.62	0.085	0.103
J	2.40		0.094	
K		4.20		0.165
L	3.30		0.130	

TAPE AND REEL SPECIFICATION-SMC

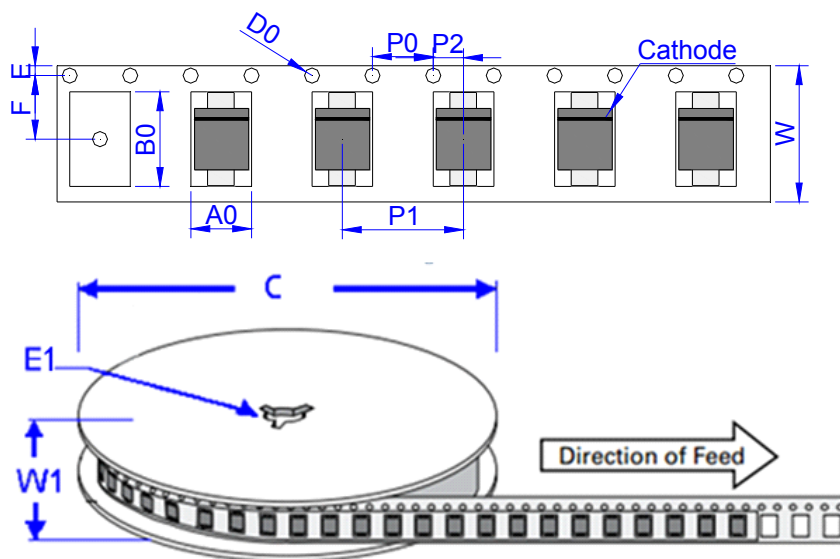

Ref.	Dimensions	
	Millimeters	Inches
A0	6.05 ± 0.3	0.238 ± 0.012
B0	8.31 ± 0.3	0.327 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	7.50 ± 0.2	0.295 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	16.0 ± 0.2	0.630 ± 0.008
W1	19.7 ± 2.0	0.776 ± 0.079

PART No.	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SMCJxxAH/CAH	0.262	3,000	48,000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 3.1st version which is made in 16-Apr.-2021. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2021Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.