

Surface Mount Transient Voltage Suppressors

High temperature stability and high reliability conditions



DO-218AB



FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology.
- $T_J = 175^{\circ}\text{C}$ capability suitable for high reliability and automotive requirement.
- Low leakage current.
- Meets MSL-1, per J-STD-020, LF maximum peak of 245°C .
- AEC-Q101 qualified.
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC.

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

MECHANICAL DATA

Case: DO-218AB

Molding compound meets UL 94V-0 flammability rating

Base P/NHE3-RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002




PRIMARY CHARACTERISTICS	
V_R	36V/51V
P_{PP} (10/1000 μs)	15000W
I_{PP} (8/20 μs)	1000A
P_D	8.0W
T_{Jmax}	175°C
Polarity	Uni/Bi-directional
Package	DO-218AB

MAXIMUM RATINGS($T_C=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)			
Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000 μs waveform	P_{PP}	15000	Watts
Peak pulse current on 8/20 μs waveform	I_{PP}	1000	Amps
Peak forward surge current, 8.3ms single half sine wave(Note 1)	I_{FSM}	300	Amps
Maximum instantaneous forward voltage at 100A for unidirectional only	V_F	5	Volts
Power dissipation on infinite heat sink at $T_C=25^{\circ}\text{C}$	P_D	8.0	Watts
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +175	$^{\circ}\text{C}$
Typical thermal resistance, junction to case	$R_{\theta JC}$	0.9	$^{\circ}\text{C/W}$

Note

(1) Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

ELECTRICAL CHARACTERISTICS								
Part Number		V_R	I_T	$I_R@V_R$	$V_{BR}@I_T$		$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-polar	Bi-polar	V	mA	μA	min(V)	max (V)	V	A
15KP36A-DB	15KP36CA-DB	36.0	5	10	36.69	44.20	55.0	272.7
15KP51A-DB	15KP51CA-DB	51.0	5	10	52.04	62.70	76.3	182.1

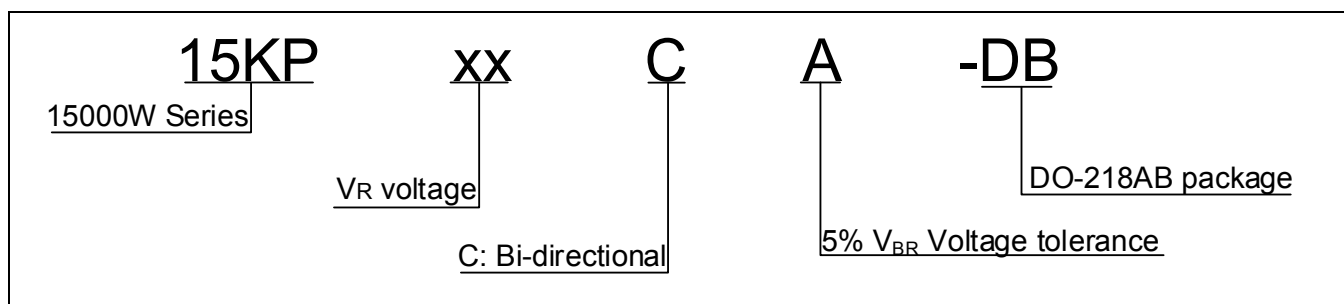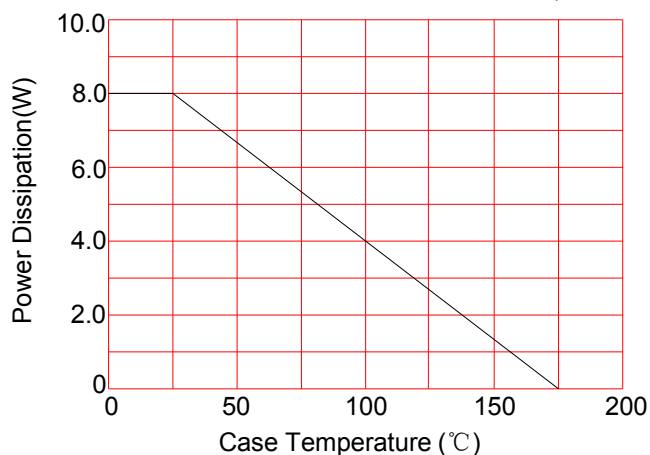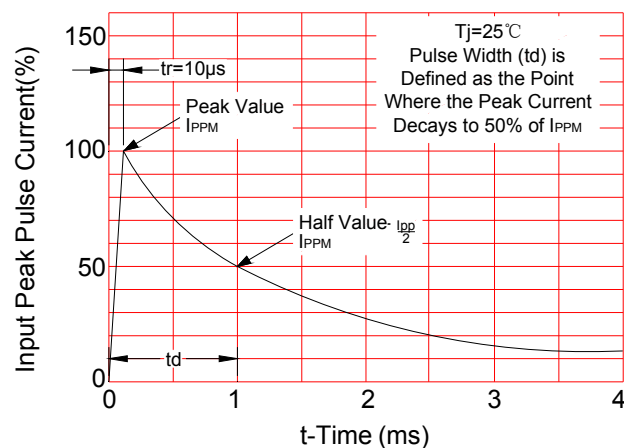Note:①.Surge waveform: 10/1000 μs V_R : Stand-off voltage -- Maximum voltage that can be applied V_{BR} : Breakdown voltage V_C : Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP} I_R : Reverse leakage current I_T : Test current**ORDERING INFORMATION****RATINGS AND CHARACTERISTICS CURVES** ($T_A=25^\circ C$, unless otherwise noted)**FIG.1: Power Derating Curve****FIG.2: Pulse Waveform**

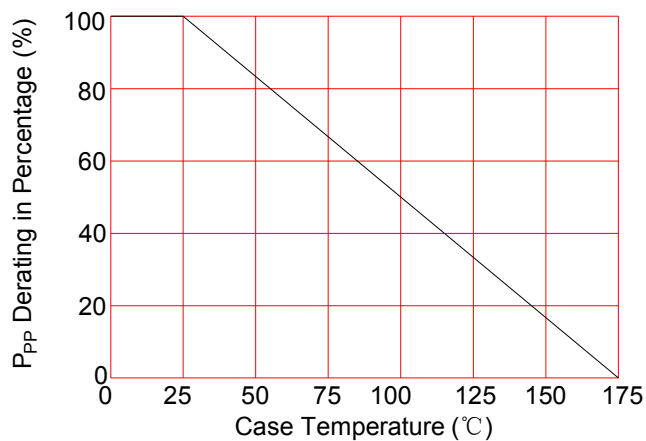


FIG.3: Peak Power Dissipation

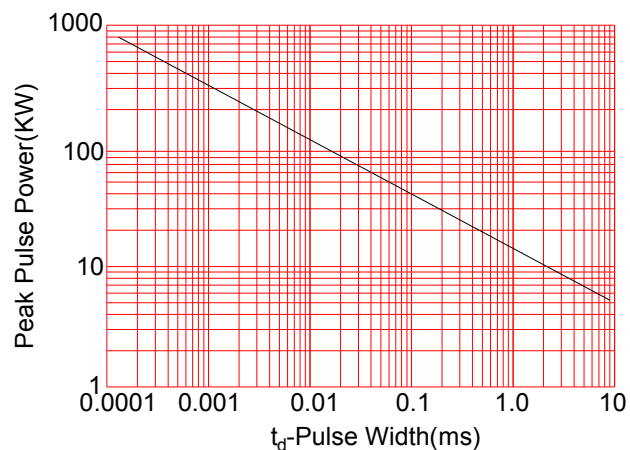


FIG.4: Pulse Derating Curve


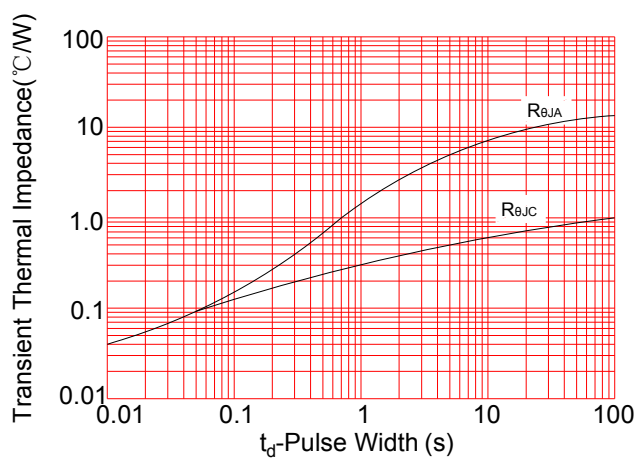


FIG.5: Typical Transient Thermal Impedance

MARKING

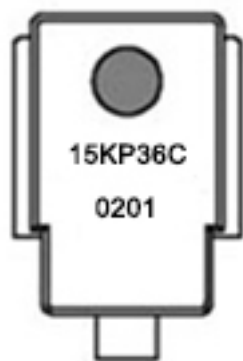

15KP36C: Device marking code


0201: "0" -- 2020 (year)

"2"--2 (month)


"01" -- (lot)

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.6)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_p)		8 min. Max
Do not exceed		+260°C

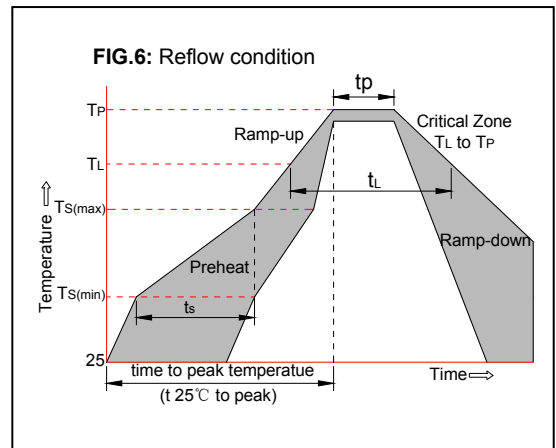


PACKAGE MECHANICAL DATA

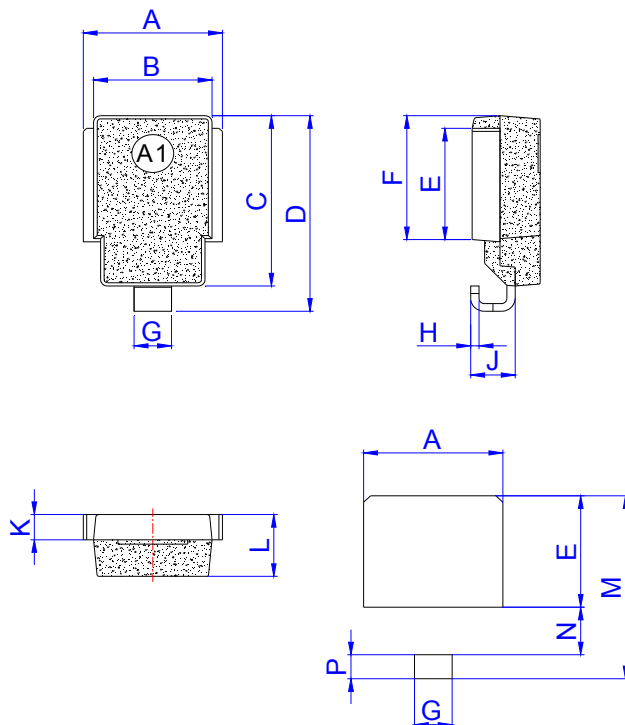

DO-218AB

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	9.5	10.5	0.374	0.413
B	8.3	8.7	0.327	0.342
C	13.3	13.7	0.524	0.539
D	15.0	16.0	0.592	0.628
E	8.5	9.1	0.335	0.358
F	9.5	10.1	0.374	0.398
G	2.4	3.0	0.094	0.118
H	0.5	0.7	0.020	0.028
J	2.7	3.7	0.106	0.146
K	1.9	2.1	0.075	0.083
L	4.7	5.1	0.185	0.201
M	14.2	14.8	0.559	0.583
N	3.5	4.1	0.138	0.161
P	1.6	2.2	0.063	0.087

TAPE AND REEL SPECIFICATION-DO-218AB

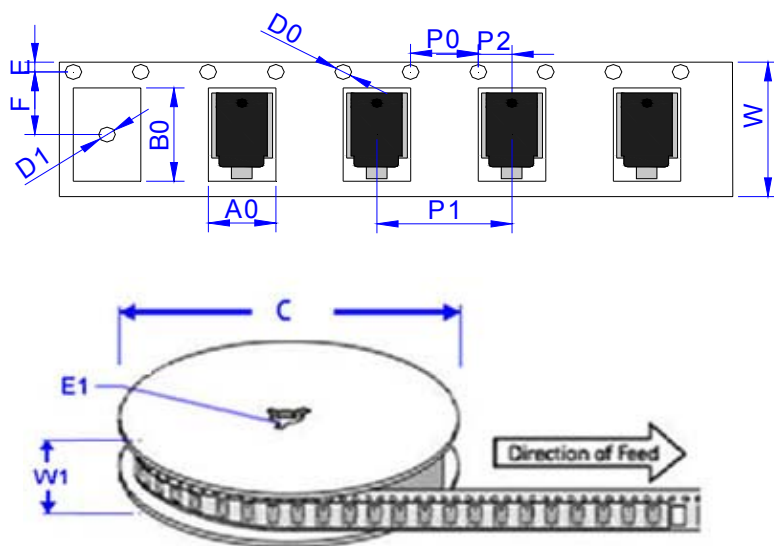

Ref.	Dimensions	
	Millimeters	Inches
A0	10.80 ± 0.3	0.425 ± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0 ± 0.3	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061 ± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

ORDERING INFORMATION			
PART No.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
15KPxxA(CA)-DB	750	3000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 0.1st version which is made in 18-Feb.-2020. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.