

Surface Mount Transient Voltage Suppressors

High temperature stability and high reliability conditions



DO-218AB



Bi-directional

FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology.
- $T_J = 175^{\circ}\text{C}$ capability suitable for high reliability and automotive requirement.
- Available in bi-directional polarity.
- Low leakage current.
- Meets ISO16750-2 surge specification(varied by test condition).
- Meets MSL-1, per J-STD-020, LF maximum peak of 260°C .
- AEC-Q101 qualified.
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC.

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

MECHANICAL DATA

Case: DO-218AB

Molding compound meets UL 94V-0 flammability rating

Base P/NHE3-RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002

PRIMARY CHARACTERISTICS	
V_R	33V to 36V
P_{PP} (10/1000 μs)	8000W
P_{PP} (10/10000 μs)	6000W
P_D	8.5W
T_{Jmax}	175°C
Polarity	Bi-directional
Package	DO-218AB

MAXIMUM RATINGS($T_C=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)			
Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000 μs waveform	P_{PP}	8000	Watts
Peak pulse power dissipation on 10/10000 μs waveform		6000	Watts
Power dissipation on infinite heat sink at $T_C=25^{\circ}\text{C}$	P_D	8.5	Watts
Peak pulse current with 10/1000 μs waveform	$I_{PPM}^{(1)}$	See next table	Amps
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +175	$^{\circ}\text{C}$
Typical thermal resistance, junction to case	$R_{\theta JC}$	0.85	$^{\circ}\text{C/W}$
Typical thermal resistance, junction to ambient	$R_{\theta JA}$	11	$^{\circ}\text{C/W}$

Note

(1) Non-repetitive current pulse derated above $T_A=25^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS								
Part Number	V _R	I _T	I _R @V _R		V _{BR} @I _T		V _C @I _{PP}	I _{PP}
Bi-polar	V	mA	µA@25°C	µA@175°C	min(V)	max (V)	V	A
SM8T33CA-AL	33.0	5	5	150	36.7	40.6	53.3	150
SM8T36CA-AL	36.0	5	5	150	40.0	44.2	58.1	138

Note:

- ①.Surge waveform: 10/1000µs
- V_R: Stand-off voltage -- Maximum voltage that can be applied
- V_{BR}: Breakdown voltage
- V_C: Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP}
- I_R: Reverse leakage current
- I_T: Test current

ORDERING INFORMATION

SM8T

SM8T 8000W Series

xx

V_R voltage

C

C: Bi-directional


A

5% V_{BR} Voltage tolerance

-AL

Process code

RATINGS AND CHARACTERISTICS CURVES (T_A=25°C, unless otherwise noted)

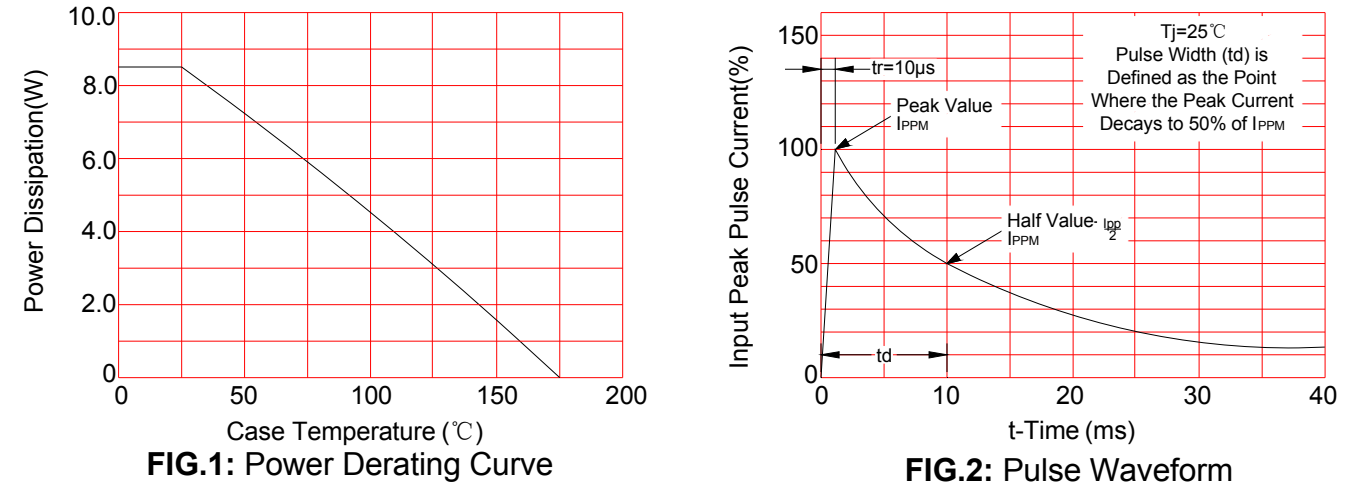

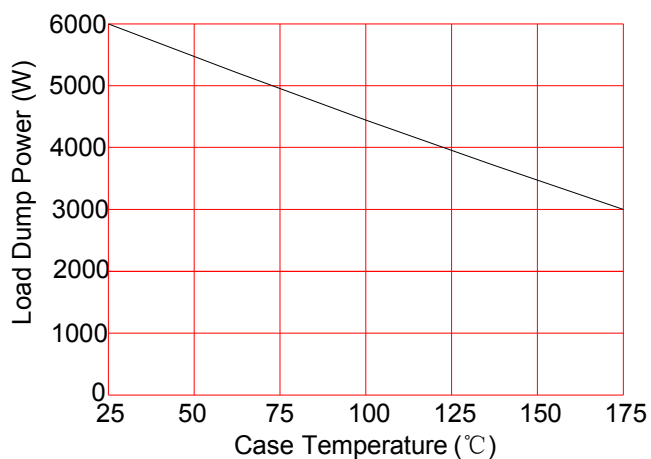


FIG.3: Load Dump Power Characteristics
(10ms Exponential Waveform)

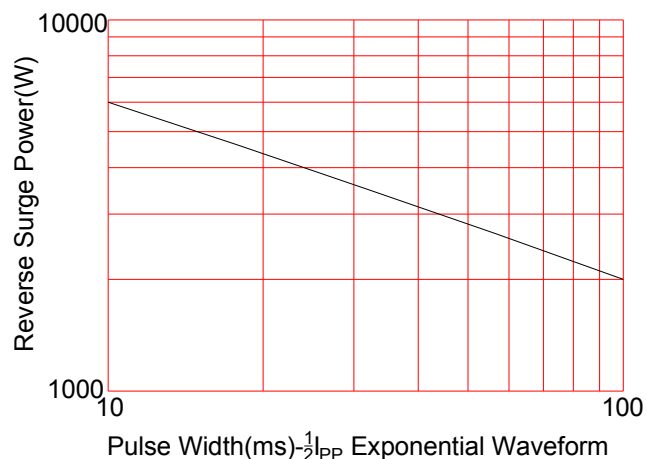


FIG.4: Reverse Power Capability

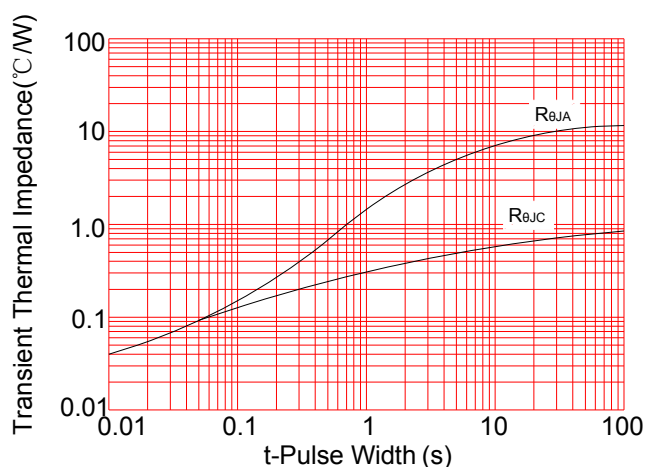


FIG.5: Typical Transient Thermal Impedance


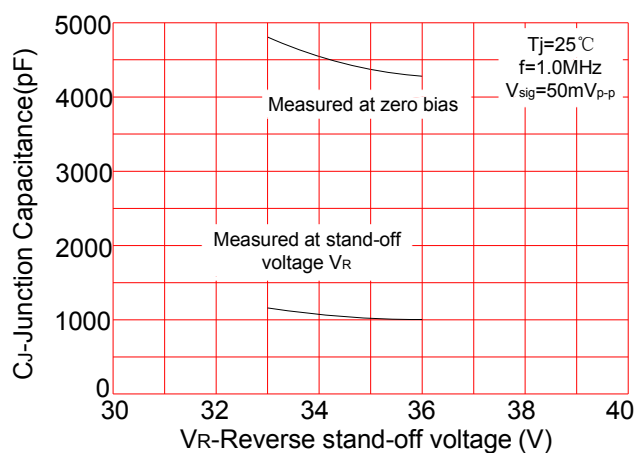


FIG.6: Typical junction capacitance

MARKING



SM8T36C: Device marking code


0101: "0" -- 2020 (year)

"1"--1 (month)


"01" -- (lot)

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

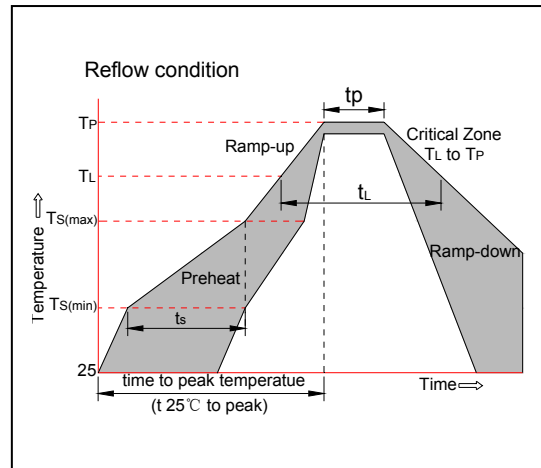


PACKAGE MECHANICAL DATA

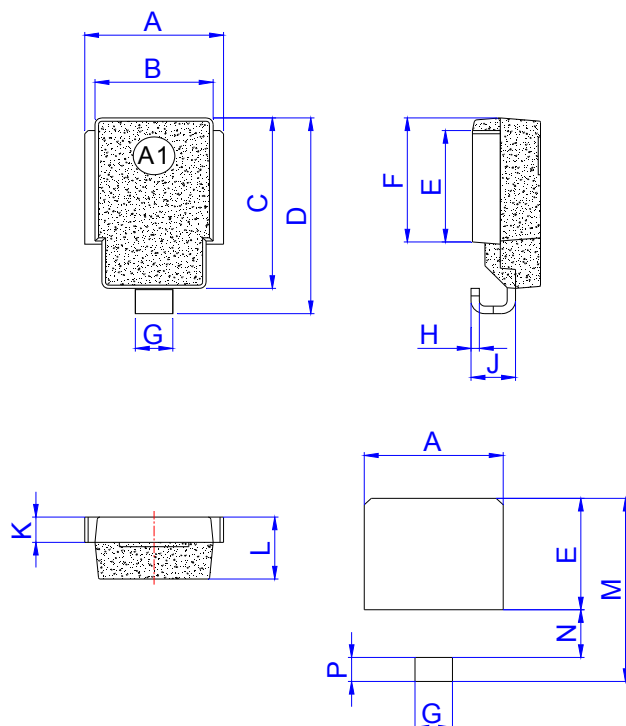

DO-218AB

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	9.5	10.5	0.374	0.413
B	8.3	8.7	0.327	0.342
C	13.3	13.7	0.524	0.539
D	15.0	16.0	0.592	0.628
E	8.5	9.1	0.335	0.358
F	9.5	10.1	0.374	0.398
G	2.4	3.0	0.094	0.118
H	0.5	0.7	0.020	0.028
J	2.7	3.7	0.106	0.146
K	1.9	2.1	0.075	0.083
L	4.7	5.1	0.185	0.201
M	14.2	14.8	0.559	0.583
N	3.5	4.1	0.138	0.161
P	1.6	2.2	0.063	0.087

TAPE AND REEL SPECIFICATION-DO-218AB

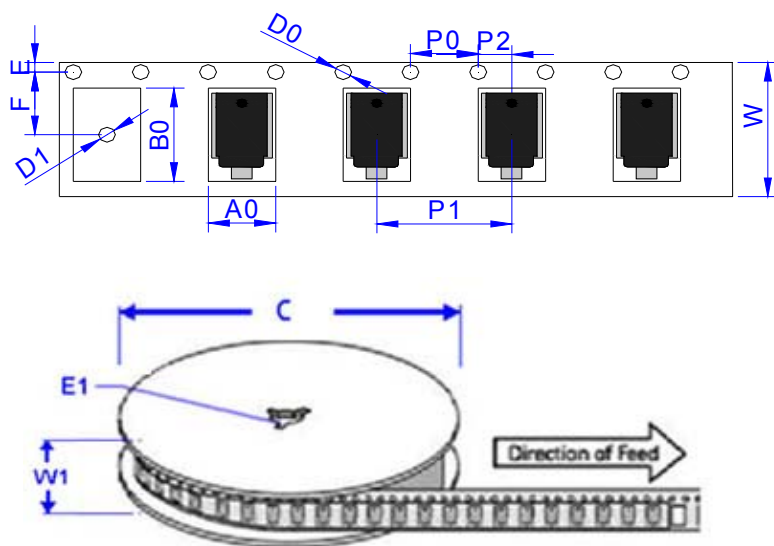

Ref.	Dimensions	
	Millimeters	Inches
A0	10.80 ± 0.3	0.425± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0 ± 0.3	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

ORDERING INFORMATION				
PART No.	UNIT WEIGHT (g) typ	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SM8TxxCA-AL	3.040	750	3000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the second version which is made in 26-Apr.-2021. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.