




DESCRIPTION:

With high ability to withstand the shock loading of large current, JST24 series triacs provide high dv/dt rate with strong resistance to electromagnetic interface. With high commutation performances, 3 quadrants products especially recommended focus on inductive load. From all three terminals to external heatsink, JST24A and JST24Z provide a rated insulation voltage of 2500 V_{RMS}, and JST24F provides a rated insulation voltage of 2000 V_{RMS}, complying with UL standards (File ref: E252906). All the packages listed above are RoHS compliant. (2011/65/EU)

MAIN FEATURES

Symbol	Value	Unit
I _{T(RMS)}	25	A
V _{DRM} / V _{R_{RM}}	600/800/1200/1600	V

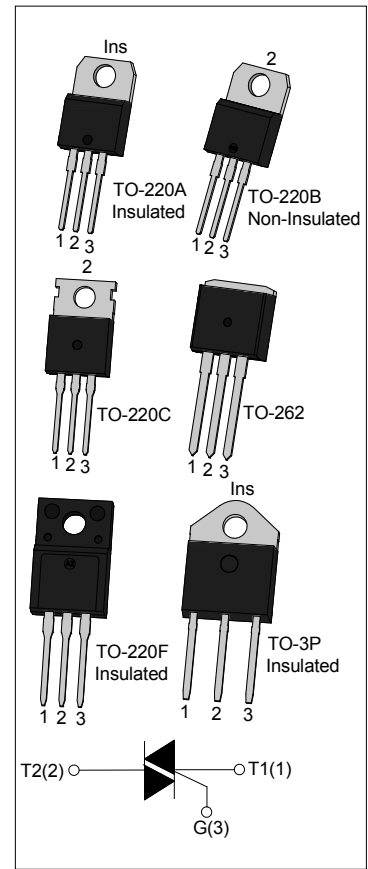

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T _{stg}	-40-150	°C
Operating junction temperature range		T _j	-40-125	°C
Repetitive peak off-state voltage (T _j =25°C)		V _{DRM}	600/800/1200/1600	V
Repetitive peak reverse voltage (T _j =25°C)		V _{R_{RM}}	600/800/1200/1600	V
RMS on-state current	TO-220A(Ins)/ TO-220F(Ins) (T _c =70°C)	I _{T(RMS)}	25	A
	TO-220C/ TO-220B(Non-Ins) (T _c =85°C)			
	TO-262 (T _c =50°C)			
	TO-3P(Ins) (T _c =95°C)			
Non repetitive surge peak on-state current (full cycle, F=50Hz)		I _{TSM}	250	A
I ² t value for fusing (t _p =10ms)		I ² t	340	A ² s

Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$)	dI/dt	50	A/ μ s
Peak gate current	I_{GM}	4	A
Average gate power dissipation	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

V_{DRM}/V_{RRM} : 600/800V

Symbol	Test Condition	Quadrant		JST24-600/800V		Unit
				BW	CW	
I_{GT}	$V_D = 12V$ $R_L = 33\Omega$	I - II - III	MAX	50	35	mA
V_{GT}		I - II - III	MAX	1.3		V
V_{GD}	$V_D = V_{DRM}$ $T_j = 125^\circ\text{C}$ $R_L = 3.3K\Omega$	I - II - III	MIN	0.2		V
I_L	$I_G = 1.2I_{GT}$	I - III	MAX	80	70	mA
		II		100	80	
I_H	$I_T = 100\text{mA}$		MAX	75	50	mA
dV/dt	$V_D = 2/3V_{DRM}$ Gate Open $T_j = 125^\circ\text{C}$		MIN	1000	500	V/ μ s

V_{DRM}/V_{RRM} : 1200/1600V

Symbol	Test Condition	Quadrant		JST24-1200V/1600V		Unit
				BW	CW	
I_{GT}	$V_D = 12V$ $R_L = 33\Omega$	I - II - III	MAX	50	35	mA
V_{GT}		I - II - III	MAX	1.5		V
V_{GD}	$V_D = V_{DRM}$ $T_j = 125^\circ\text{C}$ $R_L = 3.3K\Omega$	I - II - III	MIN	0.2		V
I_L	$I_G = 1.2I_{GT}$	I - III	MAX	90	70	mA
		II		100	80	
I_H	$I_T = 100\text{mA}$		MAX	80	60	mA
dV/dt	$V_D = 2/3V_{DRM}$ Gate Open $T_j = 125^\circ\text{C}$		MIN	1500	1000	V/ μ s

$V_{DRM}/V_{RRM}: 600/800V$

Symbol	Test Condition	Quadrant		JST24-600/800V		Unit
				B	C	
I_{GT}	$V_D = 12V R_L = 33\Omega$	I - II - III	MAX	50	25	mA
		IV		70	50	
V_{GT}		ALL	MAX	1.3		V
V_{GD}	$V_D = V_{DRM} T_j = 125^\circ C$ $R_L = 3.3K\Omega$	ALL	MIN	0.2		V
I_L	$I_G = 1.2I_{GT}$	I - III - IV	MAX	80	70	mA
		II		100	90	
I_H	$I_T = 100mA$		MAX	75	60	mA
dV/dt	$V_D = 2/3V_{DRM}$ Gate Open $T_j = 125^\circ C$		MIN	500	200	V/ μs

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX)	Unit
V_{TM}	$I_{TM} = 35A$ $t_p = 380\mu s$	$T_j = 25^\circ C$	1.5	V
I_{DRM}	$V_D = V_{DRM} V_R = V_{RRM}$	$T_j = 25^\circ C$	5	μA
I_{RRM}		$T_j = 125^\circ C$	3	mA


THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	junction to case(AC)	TO-220A(Ins)	1.5	$^\circ C/W$
		TO-220C/ TO-220B(Non-Ins)	1.1	
		TO-220F(Ins)	1.7	
		TO-262	2.1	
		TO-3P(Ins)	0.67	

ORDERING INFORMATION

<p>J</p> <p>JieJie Microelectronics Co.,Ltd</p>	<p>ST</p> <p>Triacs</p> <p>$I_{T(RMS)}:25A$</p> <p>D:TO-262 C:TO-220C Z:TO-3P(Ins) A:TO-220A(Ins) F:TO-220F(Ins) B:TO-220B(Non-Ins)</p>	<p>24</p>	<p>A</p>	<p>-600</p>	<p>BW</p> <p>BW:IGT1-3\leq50mA CW:IGT1-3\leq35mA B:IGT1-3\leq50mA IGT4\leq70mA C:IGT1-3\leq25mA IGT4\leq50mA</p> <p>600:VDRM/VRRM\geq600V 800:VDRM/VRRM\geq800V 1200:VDRM/VRRM\geq1200V 1600:VDRM/VRRM\geq1600V</p>
--	---	------------------	-----------------	--------------------	--


PACKAGE MECHANICAL DATA

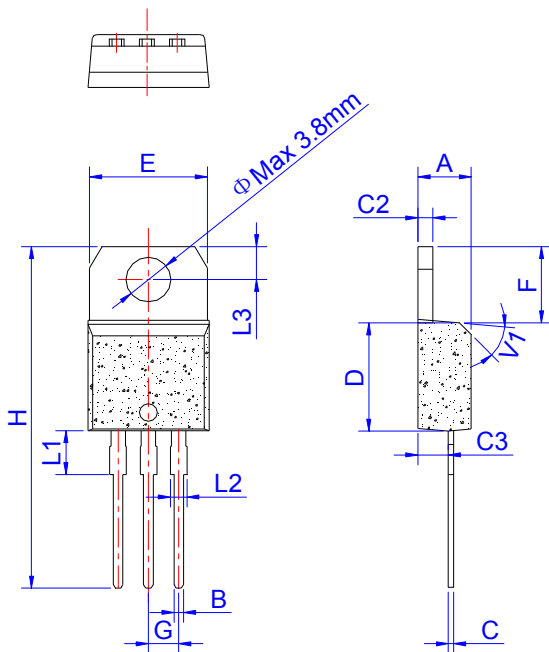

TO-220A Ins


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

PACKAGE MECHANICAL DATA

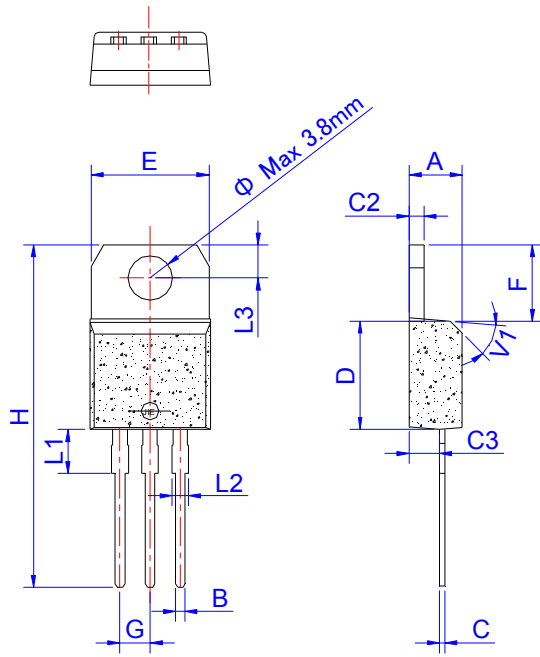

TO-220B Non-Ins


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

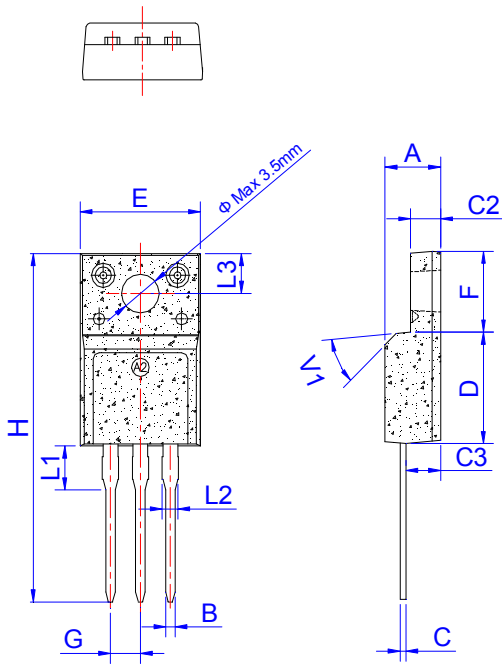


TO-220F Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

PACKAGE MECHANICAL DATA

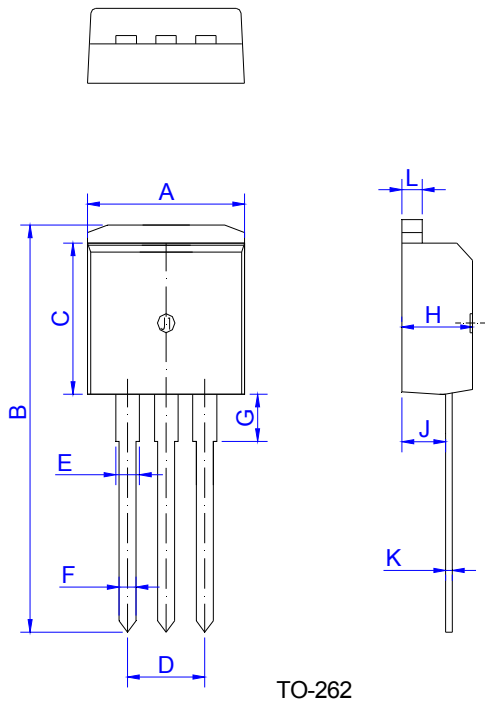


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.95		10.20	0.392		0.402
B	23.25		23.45	0.915		0.923
C	8.90		9.10	0.35		0.358
D	5.00		5.20	0.197		0.205
E	1.20		1.35	0.047		0.053
F	0.80		0.85	0.031		0.033
G	3.30		3.60	0.130		0.142
H	4.45		4.55	0.175		0.179
J	2.50		2.70	0.098		0.106
K	0.38		0.42	0.015		0.017
L	1.25		1.29	0.049		0.051

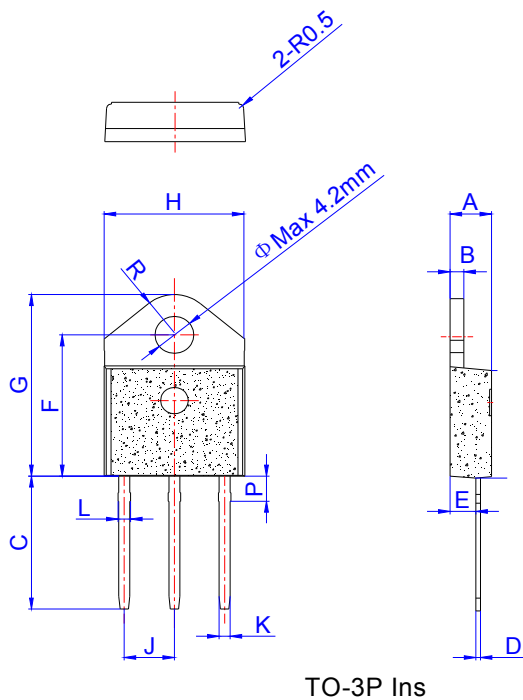

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.50		0.70	0.020		0.028
E	2.70		2.90	0.106		0.114
F	15.80		16.50	0.622		0.650
G	20.40		21.10	0.803		0.831
H	15.10		15.50	0.594		0.610
J	5.40		5.65	0.213		0.222
K	1.10		1.40	0.043		0.055
L	1.35		1.50	0.053		0.059
P	2.80		3.00	0.110		0.118
R		4.35			0.171	


PACKAGE MECHANICAL DATA


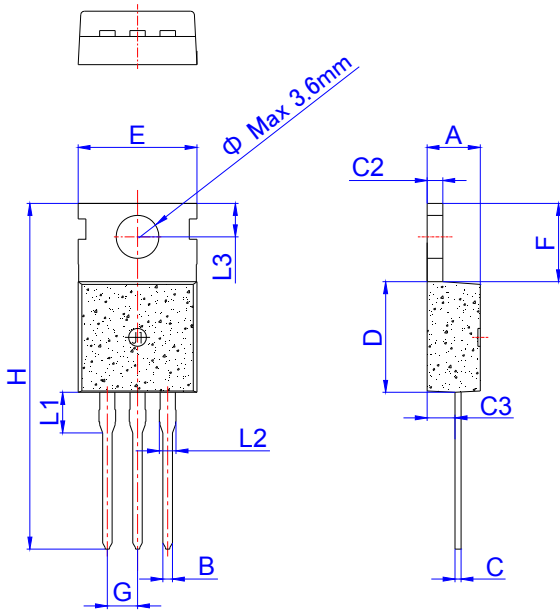


TO-220C

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	

MARKING

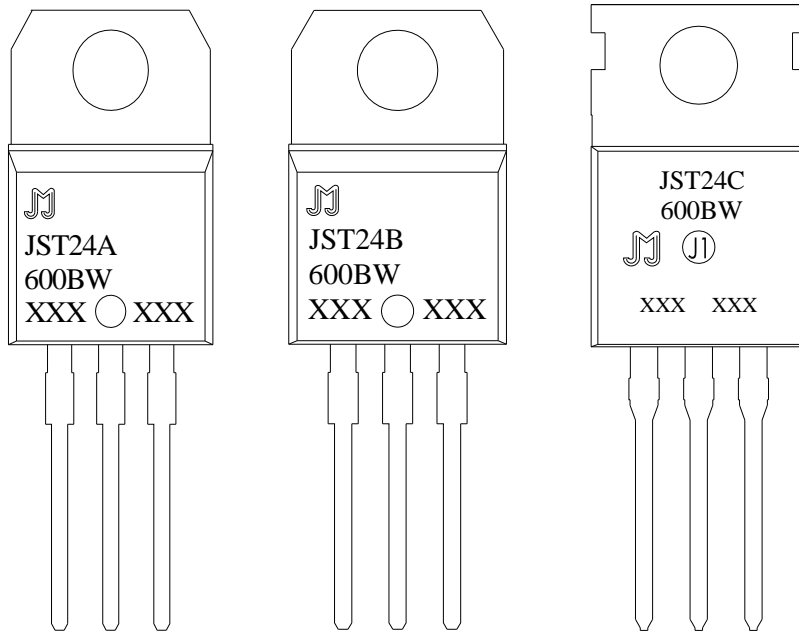

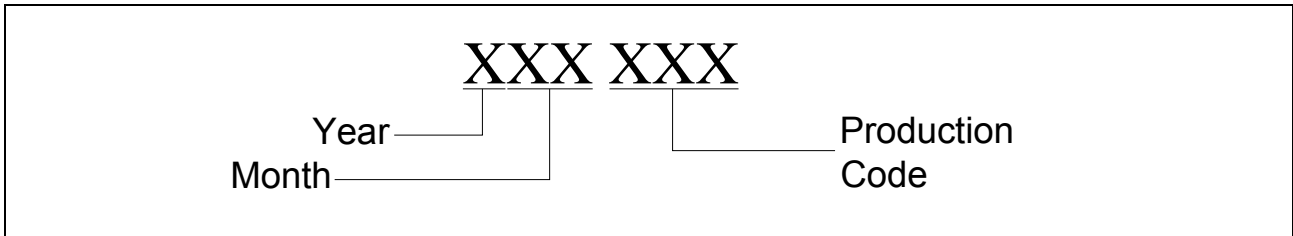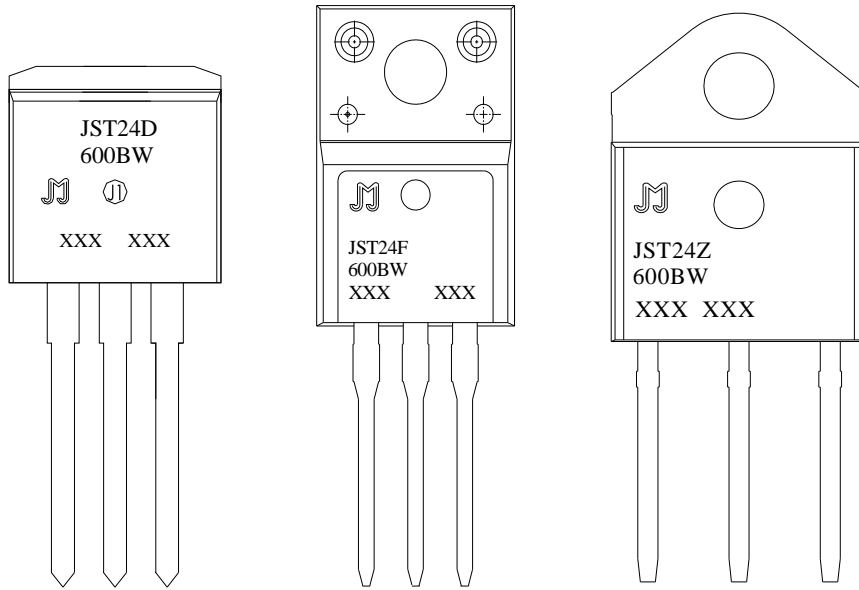

PACKAGE INFORMATION

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220A	TUBE	50	1,000	8,000
TO-220B	TUBE	50	1,000	8,000
TO-220C	TUBE	50	1,000	8,000
TO-262	TUBE	50	1,000	6,000
TO-220F	TUBE	50	1,000	8,000
TO-3P	TUBE	30	450	3,600

FIG.1: Maximum power dissipation versus RMS on-state current

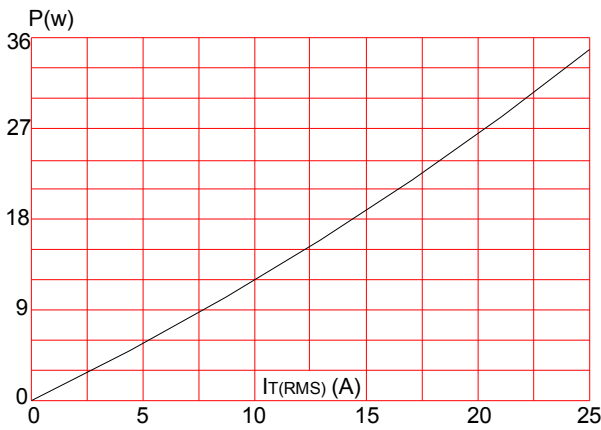


FIG.2: RMS on-state current versus case temperature

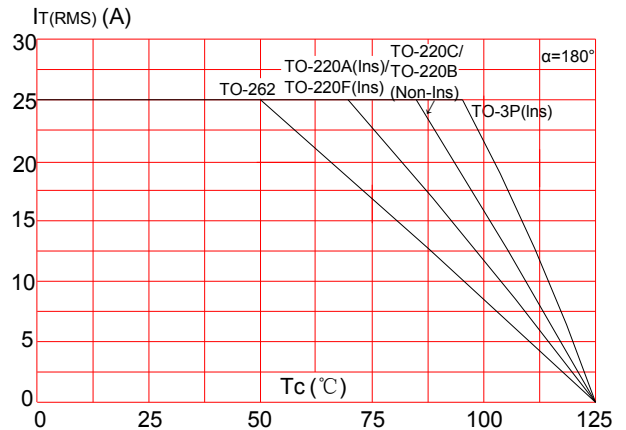


FIG.3: Surge peak on-state current versus number of cycles

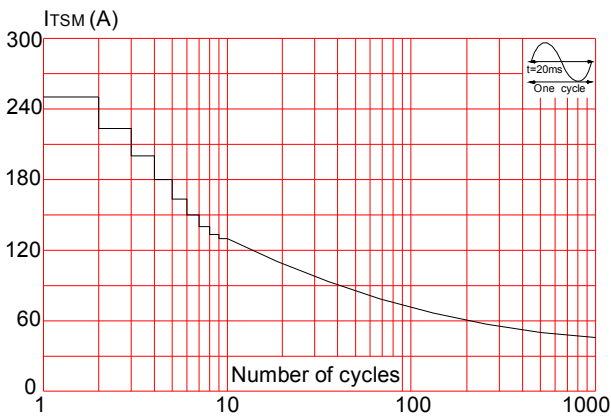


FIG.4: On-state characteristics (maximum values)

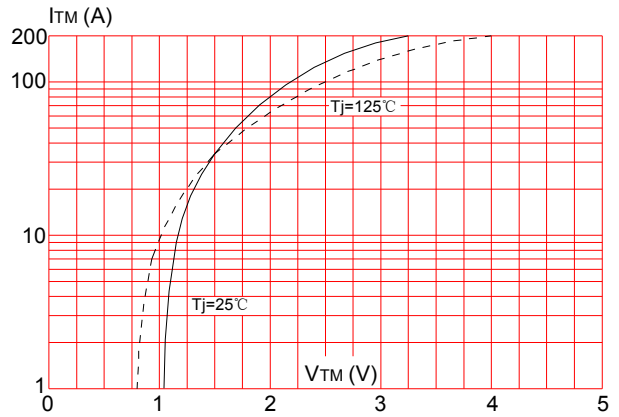


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($di/dt < 50\text{A}/\mu\text{s}$)


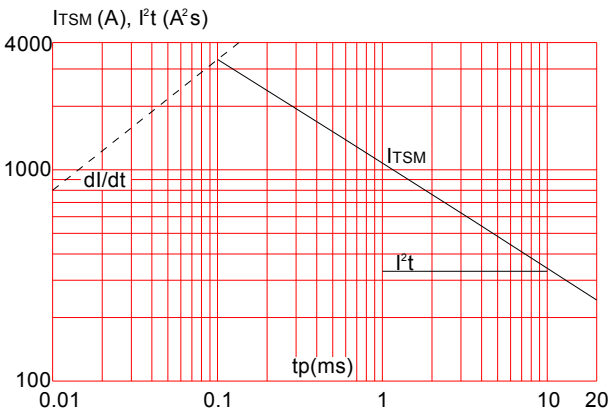


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

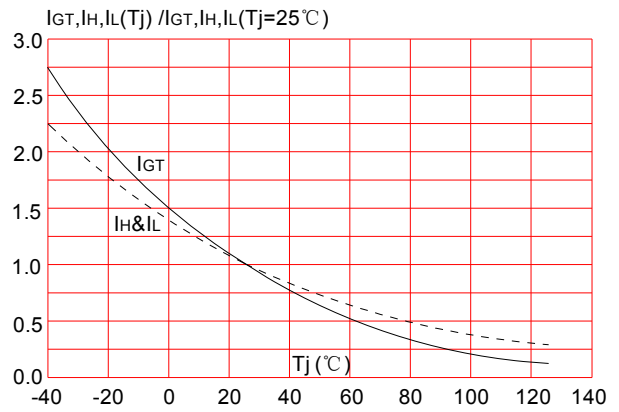


Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the eighth version which is made in 23-Mar.-2019. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2019 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.
