



## T30xxH Series 30A TRIACs


Rev.6.0

## DESCRIPTION:

T30xxH series triacs, with high ability to withstand the shock loading of large current, provide high dv/dt rate with strong resistance to electromagnetic interface. With high commutation performances, 3 quadrants products especially recommended for use on inductive load.

## MAIN FEATURES

Symbol	Value	Unit
$T_j$	150	°C
$I_{T(RMS)}$	30	A
$V_{DRM}/V_{RRM}$	600/800	V

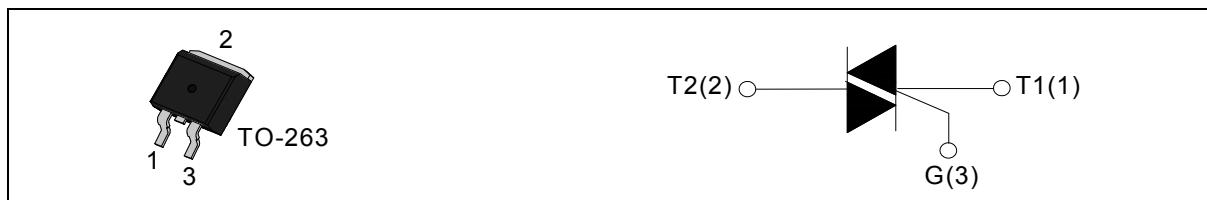

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	$T_{stg}$	-40-150	°C
Operating junction temperature range	$T_j$	-40-150	°C
Repetitive peak off-state voltage ( $T_j=25^\circ\text{C}$ )	$V_{DRM}$	600/800	V
Repetitive peak reverse voltage ( $T_j=25^\circ\text{C}$ )	$V_{RRM}$	600/800	V
RMS on-state current ( $T_c=75^\circ\text{C}$ )	$I_{T(RMS)}$	30	A
Non repetitive surge peak on-state current (full cycle, $F=50\text{Hz}$ )	$I_{TSM}$	270	A
$I^2t$ value for fusing ( $t_p=10\text{ms}$ )	$I^2t$	340	$\text{A}^2\text{s}$
Critical rate of rise of on-state current ( $I_G=2 \times I_{GT}$ )	$dI/dt$	50	$\text{A}/\mu\text{s}$
Peak gate current	$I_{GM}$	4	A
Average gate power dissipation	$P_{G(AV)}$	1	W
Peak gate power	$P_{GM}$	10	W

ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ\text{C}$  unless otherwise specified)

Symbol	Test Condition	Quadrant		Value		Unit
				T3035H	T3050H	
I <sub>GT</sub>	$V_D = 12\text{V}$ $R_L = 33\Omega$	I - II - III	MAX	35	50	mA
V <sub>GT</sub>		I - II - III	MAX	1.3		V
V <sub>GD</sub>	$V_D = V_{DRM}$ $T_j = 150^\circ\text{C}$ $R_L = 3.3\text{K}\Omega$	I - II - III	MIN	0.2		V
I <sub>L</sub>	$I_G = 1.2I_{GT}$	I - III	MAX	50	70	mA
		II		60	80	
I <sub>H</sub>	$I_T = 100\text{mA}$		MAX	40	50	mA
dV/dt	$V_D = 2/3V_{DRM}$ Gate Open $T_j = 150^\circ\text{C}$		MIN	500	1000	V/ $\mu\text{s}$


## STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX)	Unit
V <sub>TM</sub>	$I_{TM} = 35\text{A}$	$t_p = 380\mu\text{s}$	$T_j = 25^\circ\text{C}$	1.5
I <sub>DRM</sub>			$T_j = 25^\circ\text{C}$	5
I <sub>RRM</sub>	$V_D = V_{DRM}$	$V_R = V_{RRM}$	$T_j = 150^\circ\text{C}$	3


## THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
R <sub>th(j-c)</sub>	junction to case(AC)	TO-263	2.1	°C/W
R <sub>th(j-a)</sub>	junction to ambient		45	

## ORDERING INFORMATION


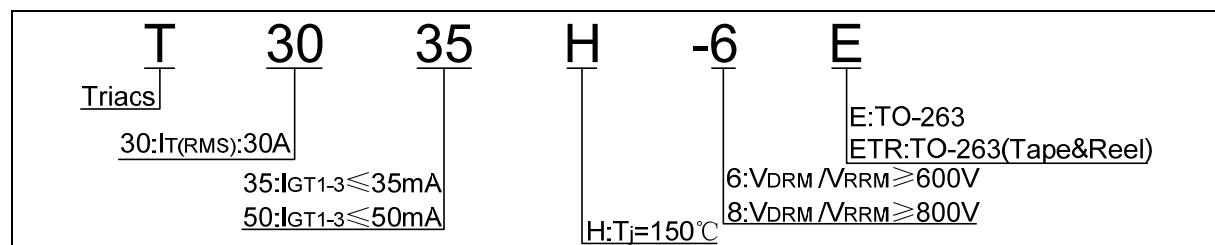



## PACKAGE MECHANICAL DATA

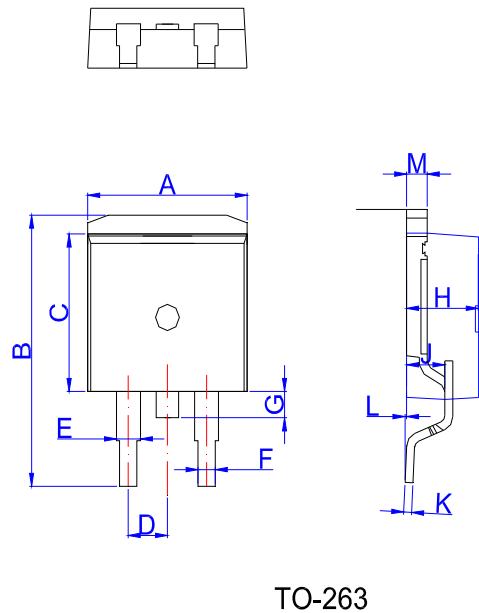

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.4		9.6	0.37		0.378
D		2.54			0.100	
E	1.20		1.40	0.047		0.055
F	0.75		0.85	0.029		0.033
G			1.75			0.069
H	4.40		4.70	0.173		0.185
J	2.30		2.70	0.091		0.106
K	0.38		0.55	0.015		0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25		1.35	0.049		0.053


## MARKING

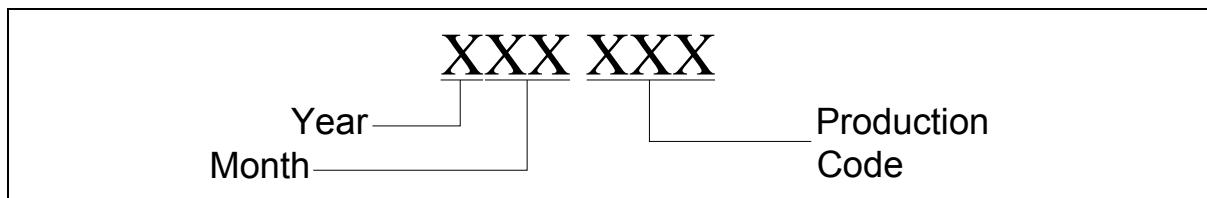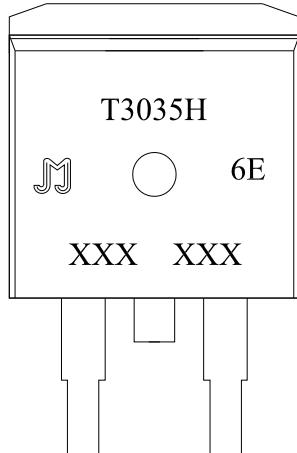

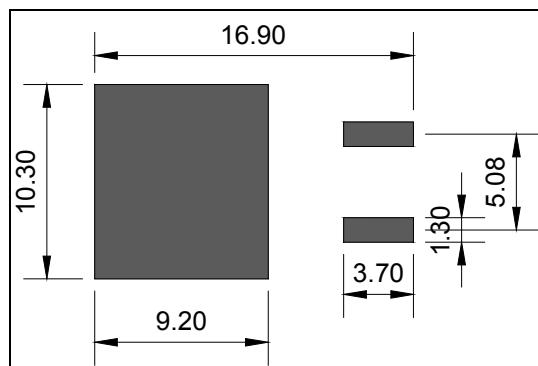
**FOOTPRINT-TO-263 (dimensions in mm)**

**PACKAGE INFORMATION**

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-263	TUBE	50	1,000	6,000
TO-263	TUBE	50	1,000	8,000
PACKAGE	OUTLINE	REEL (PCS)	PER CARTON (PCS)	TAPE & REEL
TO-263	TAPING	800	4,000	13 inch

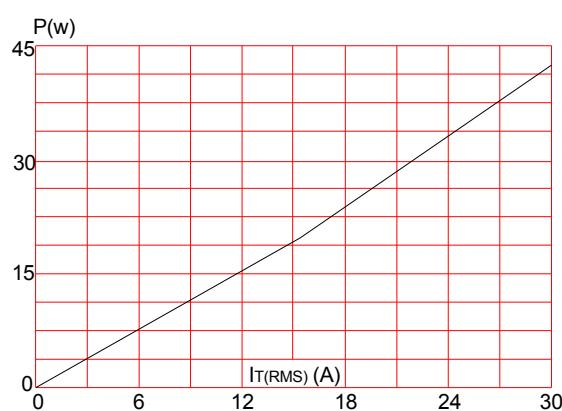
**FIG.1:** Maximum power dissipation versus RMS on-state current

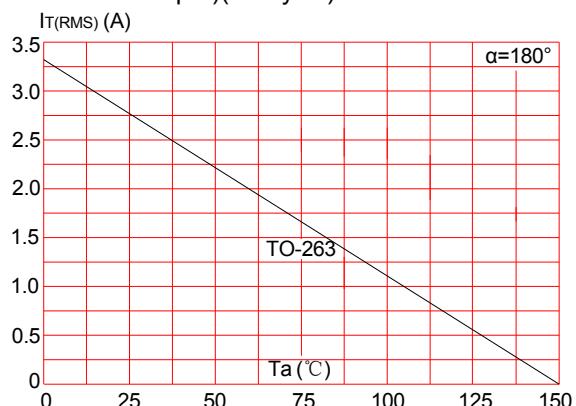


**FIG.2:** RMS on-state current versus ambient temperature (printed circuit board FR4,copper thickness:35μm)(full cycle)




**FIG.3:** Surge peak on-state current versus number of cycles

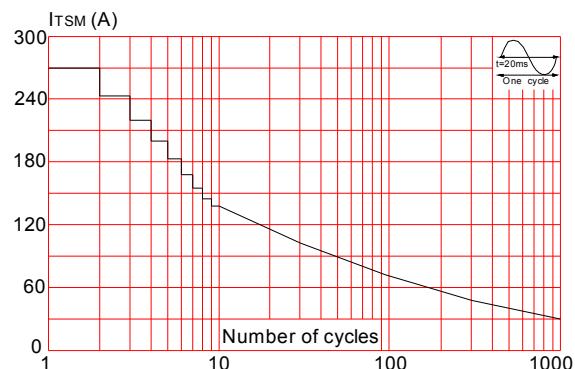


**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$ , and corresponding value of  $\frac{1}{t} \cdot t$  ( $dI/dt < 50\text{A}/\mu\text{s}$ )

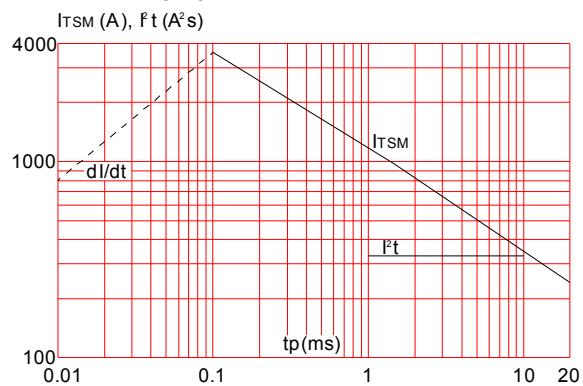

**FIG.4:** On-state characteristics (maximum values)

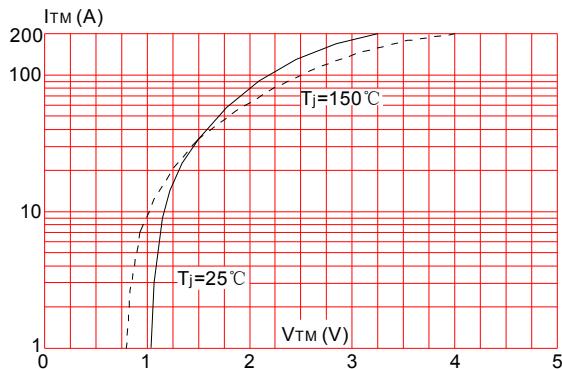


**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

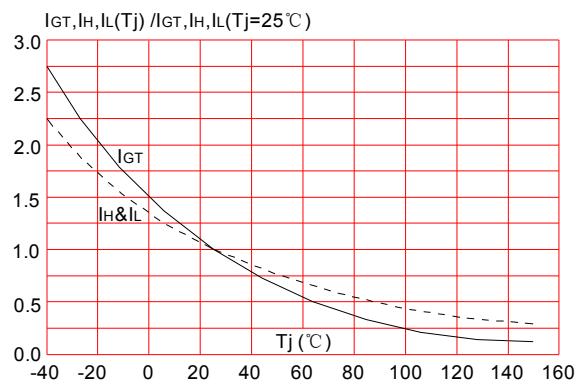

## SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150°C
	-Temperature Max ( $T_{s(max)}$ )	+200°C
	-Time (Min to Max) ( $t_s$ )	60-180 secs.
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ ) (Liquidus)	+217°C
	-Temperature( $t_L$ )	60-150 secs.
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp ( $T_p$ )		8 min. Max
Do not exceed		+260°C

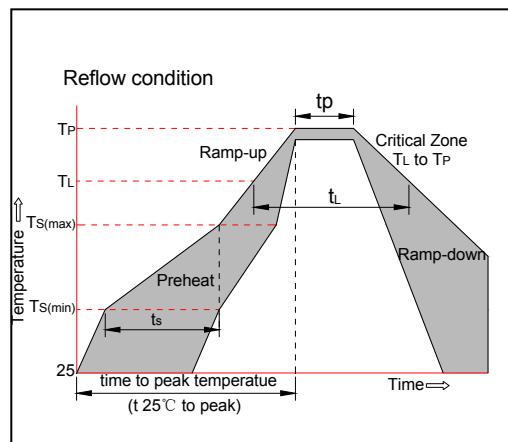

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the sixth version which is made in 16-Mar.-2019. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2019 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.