



## JCTx40 Series 40A SCRs


Rev.8.0

## DESCRIPTION:

With high ability to withstand the shock loading of large current, JCTx40 SCRs provide high dv/dt rate with strong resistance to electromagnetic interference. They are especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc. From all three terminals to external heatsink, JCTx40A provides a rated insulation voltage of 2500 V<sub>RMS</sub>, and JCTx40F provides a rated insulation voltage of 2000 V<sub>RMS</sub>, complying with UL standards (File ref: E252906). All the packages listed above are RoHS compliant. (2011/65/EU)

## MAIN FEATURES

| Symbol            | JCT640             | JCT840 |
|-------------------|--------------------|--------|
| $V_{DRM}/V_{RRM}$ | 600V               | 800V   |
| $I_{T(RMS)}$      | 40A                |        |
| $I_{GT}$          | $\leq 35\text{mA}$ |        |

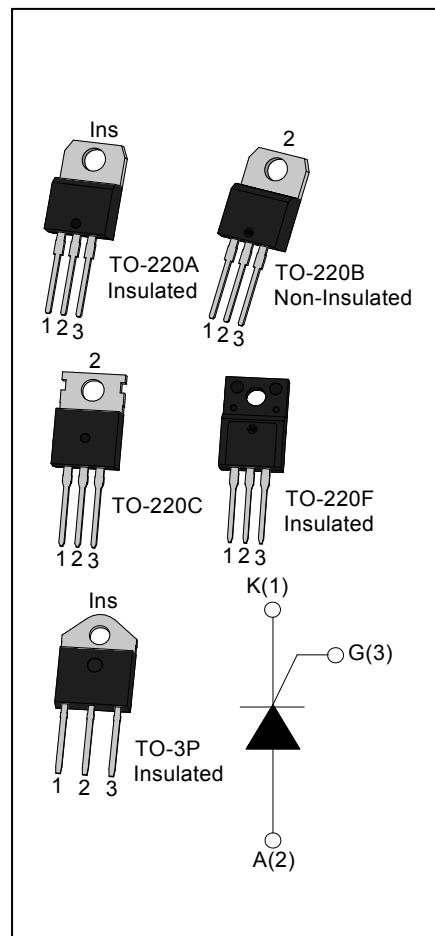

## ABSOLUTE MAXIMUM RATINGS

| Parameter   | Symbol  | Value   | Unit |
|---|---|---------|------|
| Storage junction temperature range                          | $T_{stg}$   | -40-150 | °C   |
| Operating junction temperature range                        | $T_j$   | -40-125 | °C   |
| Repetitive peak off-state voltage( $T_j=25^\circ\text{C}$ ) | $V_{DRM}$   | 600/800 | V    |
| Repetitive peak reverse voltage( $T_j=25^\circ\text{C}$ )   | $V_{RRM}$   | 600/800 | V    |
| RMS on-state current  | $I_{T(RMS)}$  | 40      | A    |
|   | TO-220A(Ins) /<br>TO-220F(Ins)/<br>( $T_c=60^\circ\text{C}$ ) |         |      |
|   | TO-220B(Non-Ins) /<br>TO-220C ( $T_c=80^\circ\text{C}$ )      |         |      |
|   | TO-3P ( $T_c=90^\circ\text{C}$ )                              |         |      |

|   |                    |      |                  |
|---|--------------------|------|------------------|
| Non repetitive surge peak on-state current<br>(tp=10ms)                           | I <sub>TSM</sub>   | 460  | A                |
| I <sup>2</sup> t value for fusing (tp=10ms)                                       | I <sup>2</sup> t   | 1060 | A <sup>2</sup> s |
| Critical rate of rise of on-state current<br>(I <sub>G</sub> =2×I <sub>GT</sub> ) | dI/dt              | 50   | A/μs             |
| Peak gate current   | I <sub>GM</sub>    | 4    | A                |
| Average gate power dissipation  | P <sub>G(AV)</sub> | 1    | W                |
| Peak gate power   | P <sub>GM</sub>    | 5    | W                |

**ELECTRICAL CHARACTERISTICS** ( $T_j=25^\circ\text{C}$  unless otherwise specified)

| Symbol          | Test Condition   | Value |      |      | Unit |
|-----------------|--|-------|------|------|------|
|                 |  | MIN.  | TYP. | MAX. |      |
| I <sub>GT</sub> | V <sub>D</sub> =12V R <sub>L</sub> =33Ω                                      | -     | 15   | 35   | mA   |
| V <sub>GT</sub> |  | -     | -    | 1.5  | V    |
| V <sub>GD</sub> | V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125°C R <sub>L</sub> =3.3KΩ | 0.2   | -    | -    | V    |
| I <sub>L</sub>  | I <sub>G</sub> =1.2I <sub>GT</sub>   | -     | -    | 90   | mA   |
| I <sub>H</sub>  | I <sub>T</sub> =500mA  | -     | -    | 75   | mA   |
| dV/dt           | V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C          | 200   | -    | -    | V/μs |

**STATIC CHARACTERISTICS**

| Symbol           | Parameter   |                       | Value(MAX) | Unit |
|------------------|---|-----------------------|------------|------|
| V <sub>TM</sub>  | I <sub>TM</sub> =80A tp=380μs                                     | T <sub>j</sub> =25°C  | 1.55       | V    |
| I <sub>DRM</sub> | V <sub>D</sub> =V <sub>DRM</sub> V <sub>R</sub> =V <sub>RRM</sub> | T <sub>j</sub> =25°C  | 10         | μA   |
| I <sub>RRM</sub> |   | T <sub>j</sub> =125°C | 4          | mA   |


**THERMAL RESISTANCES**

| Symbol               | Parameter            | Value                        | Unit |
|----------------------|----------------------|------------------------------|------|
| R <sub>th(j-c)</sub> | junction to case(AC) | TO-220A(Ins)                 | 1.2  |
|                      |                      | TO-220B(Non-Ins)/<br>TO-220C | 0.78 |
|                      |                      | TO-220F(Ins)                 | 1.3  |
|                      |                      | TO-3P(Ins)                   | 0.6  |

## ORDERING INFORMATION


|                                 |      |  |                          |                                 |
|---------------------------------|------|--|--------------------------|---------------------------------|
| J                               | CT   | 6  | 40                       | B                               |
| JieJie Microelectronics Co.,Ltd |      |  |                          |                                 |
|                                 | SCRs |  |                          |                                 |
|                                 |      | 6:V <sub>DRM</sub> / V <sub>RRM</sub> ≥ 600V |                          | F:TO-220F(Ins)                  |
|                                 |      | 8:V <sub>DRM</sub> / V <sub>RRM</sub> ≥ 800V |                          | C:TO-220C A:TO-220A(Ins)        |
|                                 |      |  |                          | B:TO-220B(Non-Ins) Z:TO-3P(Ins) |
|                                 |      |  | I <sub>T(RMS)</sub> :40A |                                 |

## PACKAGE MECHANICAL DATA

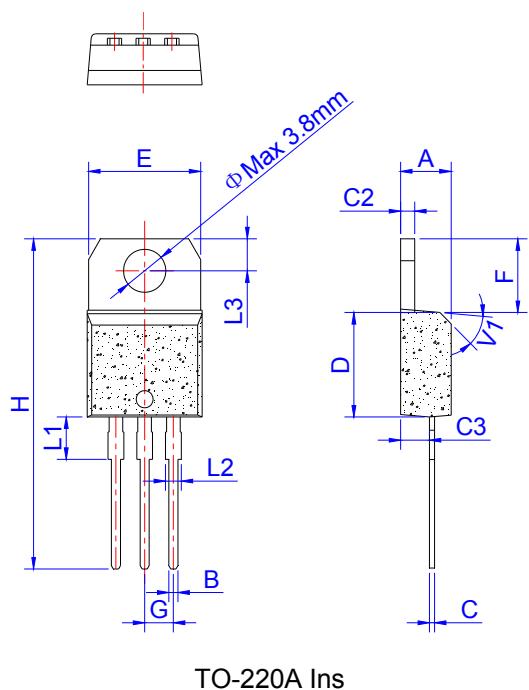


| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.40        |      | 4.60 | 0.173  |       | 0.181 |
| B    | 0.61        |      | 0.88 | 0.024  |       | 0.035 |
| C    | 0.46        |      | 0.70 | 0.018  |       | 0.028 |
| C2   | 1.21        |      | 1.32 | 0.048  |       | 0.052 |
| C3   | 2.40        |      | 2.72 | 0.094  |       | 0.107 |
| D    | 8.60        |      | 9.70 | 0.339  |       | 0.382 |
| E    | 9.80        |      | 10.4 | 0.386  |       | 0.409 |
| F    | 6.55        |      | 6.95 | 0.258  |       | 0.274 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.75 |      |        | 0.148 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   | 2.65        |      | 2.95 | 0.104  |       | 0.116 |
| V1   |             | 45°  |      |        | 45°   |       |

## PACKAGE MECHANICAL DATA

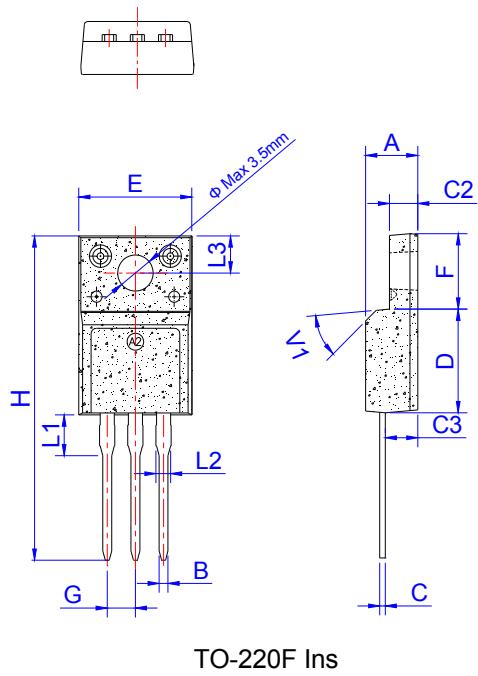


| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.50        |      | 4.90 | 0.177  |       | 0.193 |
| B    | 0.74        | 0.80 | 0.83 | 0.029  | 0.031 | 0.033 |
| C    | 0.47        |      | 0.65 | 0.019  |       | 0.026 |
| C2   | 2.45        |      | 2.75 | 0.096  |       | 0.108 |
| C3   | 2.60        |      | 3.00 | 0.102  |       | 0.118 |
| D    | 8.80        |      | 9.30 | 0.346  |       | 0.366 |
| E    | 9.80        |      | 10.4 | 0.386  |       | 0.410 |
| F    | 6.40        |      | 6.80 | 0.252  |       | 0.268 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.63 |      |        | 0.143 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   |             | 3.30 |      |        | 0.130 |       |
| V1   |             | 45°  |      |        | 45°   |       |

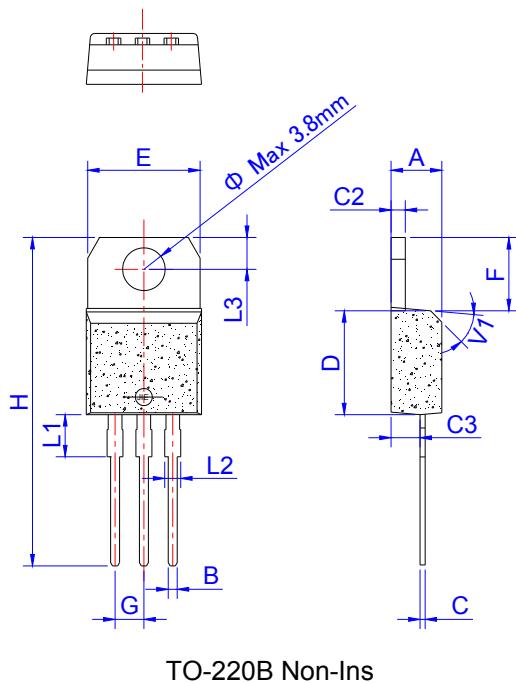


| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.40        |      | 4.60 | 0.173  |       | 0.181 |
| B    | 0.61        |      | 0.88 | 0.024  |       | 0.035 |
| C    | 0.46        |      | 0.70 | 0.018  |       | 0.028 |
| C2   | 1.21        |      | 1.32 | 0.048  |       | 0.052 |
| C3   | 2.40        |      | 2.72 | 0.094  |       | 0.107 |
| D    | 8.60        |      | 9.70 | 0.339  |       | 0.382 |
| E    | 9.60        |      | 10.4 | 0.378  |       | 0.409 |
| F    | 6.20        |      | 6.60 | 0.244  |       | 0.260 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.75 |      |        | 0.148 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   | 2.65        |      | 2.95 | 0.104  |       | 0.116 |
| V1   |             | 45°  |      |        | 45°   |       |




## PACKAGE MECHANICAL DATA

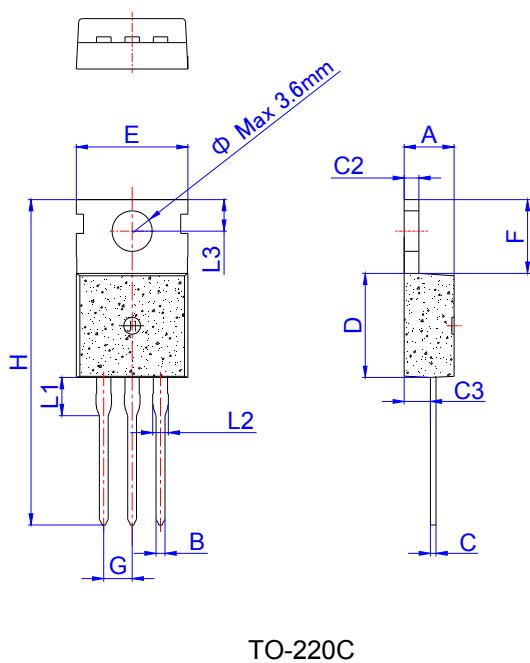

| Ref.   | Dimensions  |      |      |        |       |       |
|--------|-------------|------|------|--------|-------|-------|
|        | Millimeters |      |      | Inches |       |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A      | 4.40        |      | 4.60 | 0.173  |       | 0.181 |
| B      | 0.70        |      | 0.90 | 0.028  |       | 0.035 |
| C      | 0.45        |      | 0.60 | 0.018  |       | 0.024 |
| C2     | 1.23        |      | 1.32 | 0.048  |       | 0.052 |
| C3     | 2.20        |      | 2.60 | 0.087  |       | 0.102 |
| D      | 8.90        |      | 9.90 | 0.350  |       | 0.390 |
| E      | 9.90        |      | 10.3 | 0.390  |       | 0.406 |
| F      | 6.30        |      | 6.90 | 0.248  |       | 0.272 |
| G      |             | 2.54 |      |        | 0.1   |       |
| H      | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1     |             | 3.39 |      |        | 0.133 |       |
| L2     | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3     | 2.65        |      | 2.95 | 0.104  |       | 0.116 |
| $\Phi$ |             | 3.6  |      |        | 0.142 |       |

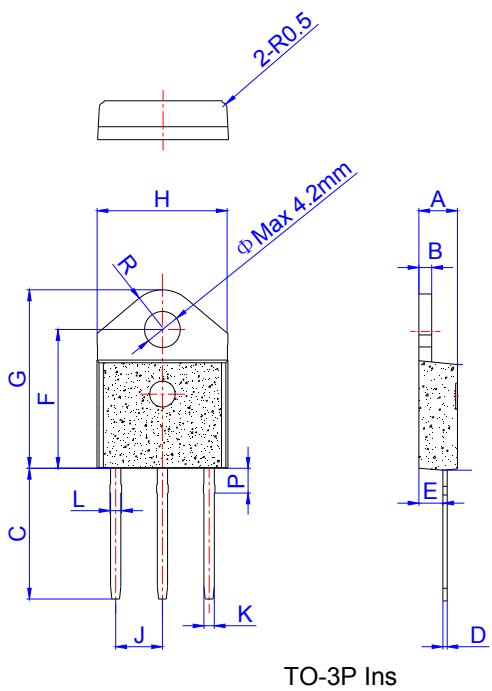


| Ref. | Dimensions  |      |       |        |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Millimeters |      |       | Inches |       |       |
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    | 4.40        |      | 4.60  | 0.173  |       | 0.181 |
| B    | 1.45        |      | 1.55  | 0.057  |       | 0.061 |
| C    | 14.35       |      | 15.60 | 0.565  |       | 0.614 |
| D    | 0.50        |      | 0.70  | 0.020  |       | 0.028 |
| E    | 2.70        |      | 2.90  | 0.106  |       | 0.114 |
| F    | 15.80       |      | 16.50 | 0.622  |       | 0.650 |
| G    | 20.40       |      | 21.10 | 0.803  |       | 0.831 |
| H    | 15.10       |      | 15.50 | 0.594  |       | 0.610 |
| J    | 5.40        |      | 5.65  | 0.213  |       | 0.222 |
| K    | 1.10        |      | 1.40  | 0.043  |       | 0.055 |
| L    | 1.35        |      | 1.50  | 0.053  |       | 0.059 |
| P    | 2.80        |      | 3.00  | 0.110  |       | 0.118 |
| R    |             | 4.35 |       |        | 0.171 |       |

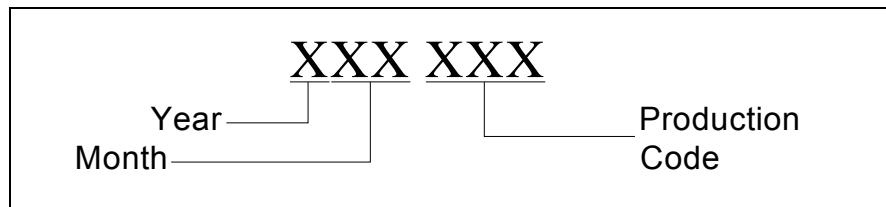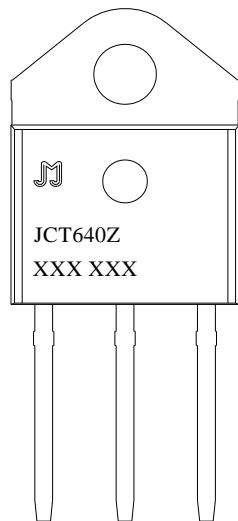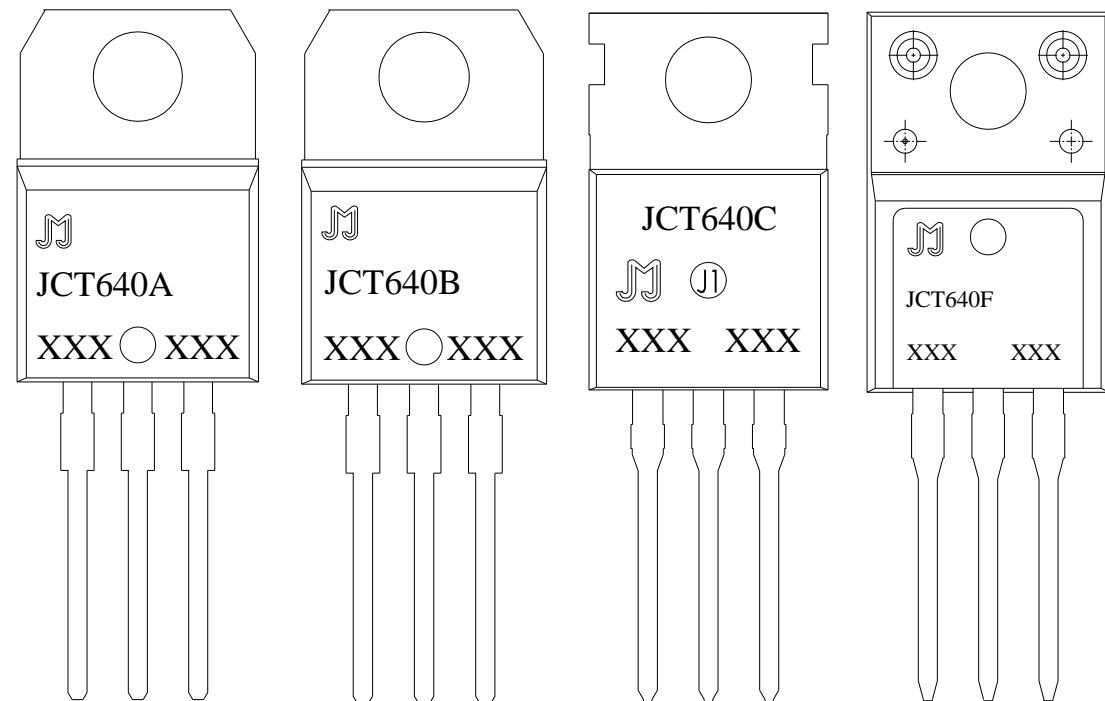
**MARKING****PACKAGE INFORMATION**

| PACKAGE | WEIGHT<br>(PER PCS) | OUTLINE | TUBE<br>(PCS) | INNER BOX<br>(PCS) | PER<br>CARTON |
|---------|---------------------|---------|---------------|--------------------|---------------|
| TO-220A | 2.308g              | TUBE    | 50            | 1,000              | 8,000         |
| TO-220B | 1.935g              | TUBE    | 50            | 1,000              | 8,000         |
| TO-220C | 2.05g               | TUBE    | 50            | 1,000              | 8,000         |
| TO-220F | 2.093g              | TUBE    | 50            | 1,000              | 8,000         |
| TO-3P   | 4.63g               | TUBE    | 30            | 450                | 3,600         |


**FIG.1:** Maximum power dissipation versus RMS on-state current

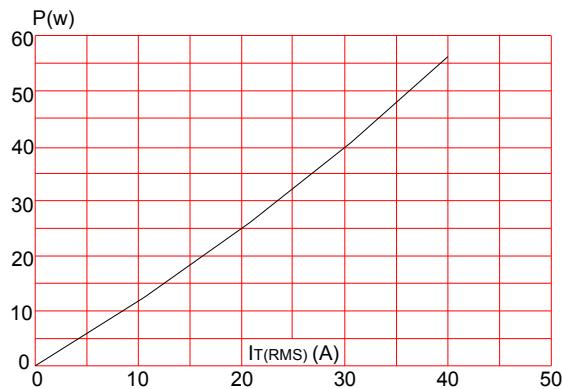


**FIG.3:** Surge peak on-state current versus number of cycles

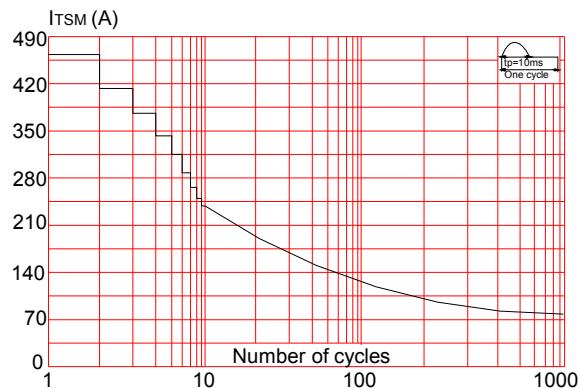


**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10\text{ms}$ , and corresponding value of  $\int I^2 t$  ( $dI/dt < 50\text{A}/\mu\text{s}$ )

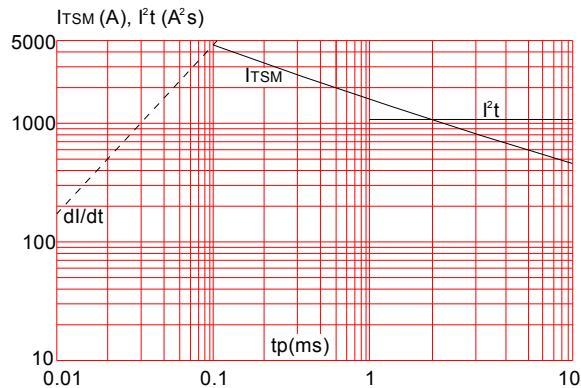


**FIG.2:** RMS on-state current versus case temperature

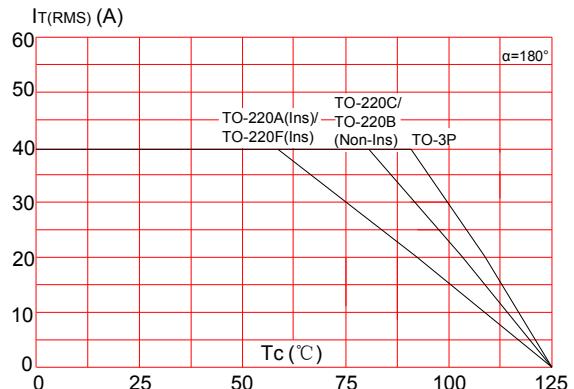

**FIG.4:** On-state characteristics (maximum values)

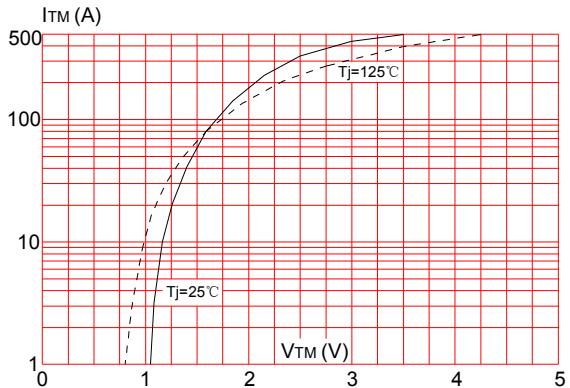

**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

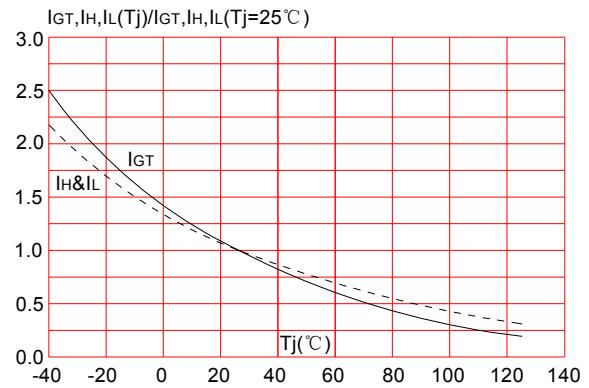

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the eighth version which is made in 21-Mar.-2019. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2019 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.