




## SM2KxxCC Series Transient Voltage Suppressor

Rev.1.0

**DESCRIPTION:**


TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

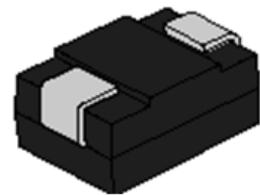

SMC

**FEATURES:**

- ◊ Low profile package.
- ◊ Low inductance.
- ◊ Excellent clamping capability.
- ◊ High peak pulse voltage capability on 1.2/50 $\mu$ s-8/20 $\mu$ s@2Ω waveform.
- ◊ Fast response time: typically less than 1.0ps from 0V to V<sub>BR</sub> min.
- ◊ High temperature to reflow soldering: 260°C/40s at terminals.
- ◊ Plastic package has under writers laboratory flammability 94V-0.
- ◊ Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C.
- ◊ Terminal: solder plated, solderable per J-STD-002.
- ◊ For surface mounted applications in order to optimize board space.

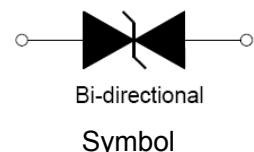


Bi-directional

Symbol

**ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage temperature range	$T_{STG}$	-55 to +150	°C
operating junction temperature range	$T_J$	-55 to +150	°C
Steady state power dissipation at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	6.5	W
Peak pulse voltage on 1.2/50 $\mu$ s-8/20 $\mu$ s@2Ω waveform	$V_{PP}$	4000	V
Peak pulse current on 1.2/50 $\mu$ s-8/20 $\mu$ s@2Ω waveform	$I_{PP}$	2000	A

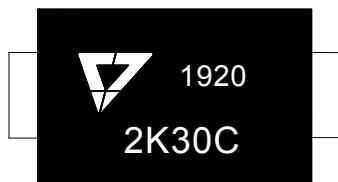**MARKING**

2K30C : Device Marking Code  
1920: The 20th week, 2019

ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ )

Part Number	Marking Code	$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_c@V_{PP}^{\text{(1)}}$	$V_{PP}^{\text{(1)}}$
Bi-Polar		V	$\mu\text{A}$	min(V)	max(V)	mA	max(V)	V
SM2K30CC	2K30C	30	1	33.30	36.80	1	65	4000
SM2K33CC	2K33C	33	1	36.70	40.60	1	70	4000
SM2K36CC	2K36C	36	1	40.00	44.20	1	72	4000
★SM2K40CC	2K40C	40	1	44.40	49.10	1	75	4000

(1) Surge waveform: 1.2/50μs-8/20μs@2Ω

$V_R$ : Stand-off voltage -- Maximum voltage that can be applied

$V_{BR}$ : Breakdown voltage

$V_c$ : Clamping voltage -- Peak voltage measured across the suppressor at a specified  $V_{PP}$

$I_R$ : Reverse leakage current

★: Products with negative resistance

## ORDERING INFORMATION

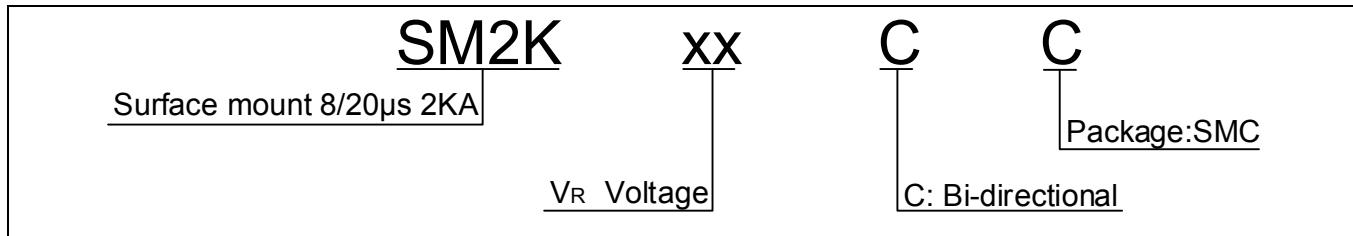
RATINGS AND V-I CHARACTERISTICS CURVES ( $T_A=25^\circ\text{C}$ , unless otherwise noted)

FIG.1:V-I curve characteristics  
(Bi-directional)

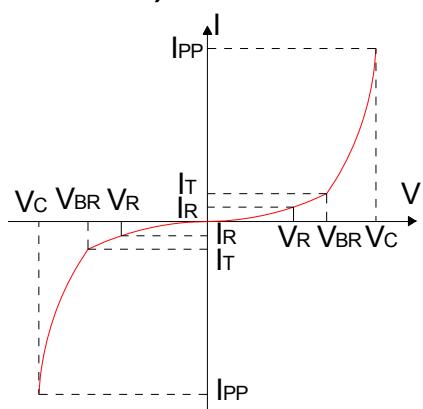
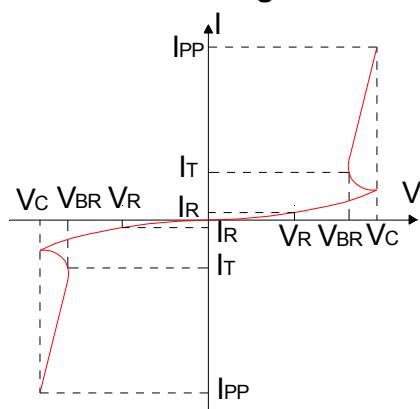
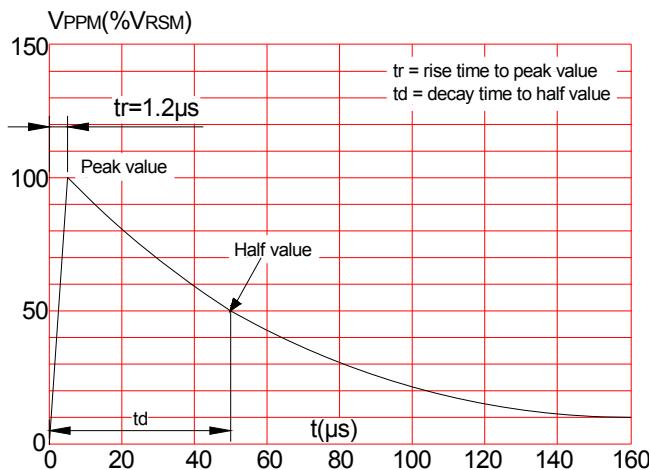



FIG.2:V-I curve characteristics  
(Bi-directional with negative resistance)



**FIG.3: Pulse waveform**




**FIG.4: Pulse waveform**

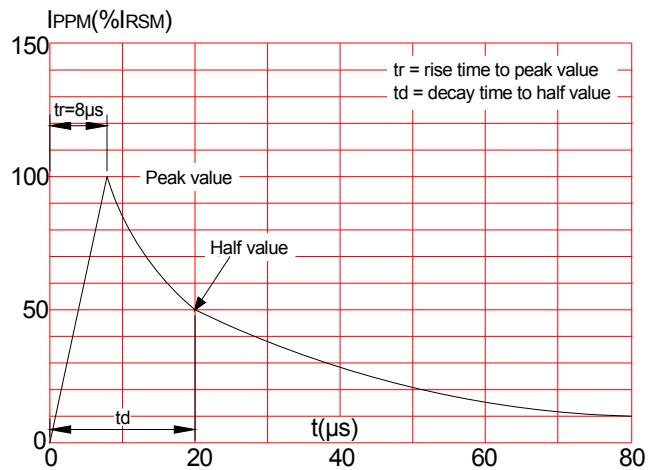


## SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min (T <sub>s(min)</sub> )	+150°C
	-Temperature Max(T <sub>s(max)</sub> )	+200°C
	-Time (Min to Max) (t <sub>s</sub> )	60-180 secs.
Average ramp up rate (Liquidus Temp (T <sub>L</sub> )to peak)		3°C/sec. Max
T <sub>s(max)</sub> to T <sub>L</sub> - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T <sub>L</sub> )(Liquidus)	+217°C
	-Temperature(t <sub>L</sub> )	60-150 secs.
Peak Temp (T <sub>p</sub> )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t <sub>p</sub> )		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T <sub>P</sub> )		8 min. Max
Do not exceed		+260°C

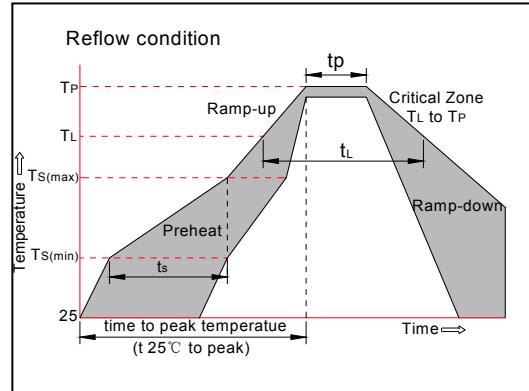


## PACKAGE MECHANICAL DATA

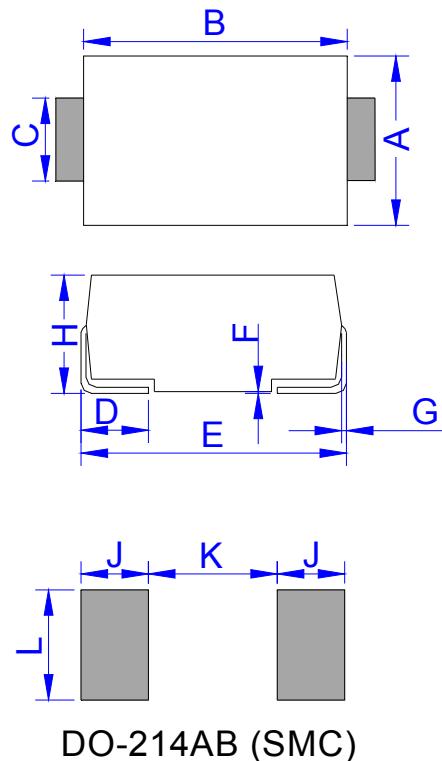

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.75	6.25	0.226	0.246
B	6.90	7.40	0.272	0.291
C	2.75	3.25	0.108	0.128
D	0.95	1.52	0.037	0.060
E	7.70	8.20	0.303	0.323
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.15	2.62	0.085	0.103
J	2.40		0.094	
K		4.20		0.165
L	3.30		0.130	

## TAPE AND REEL SPECIFICATION-SMC

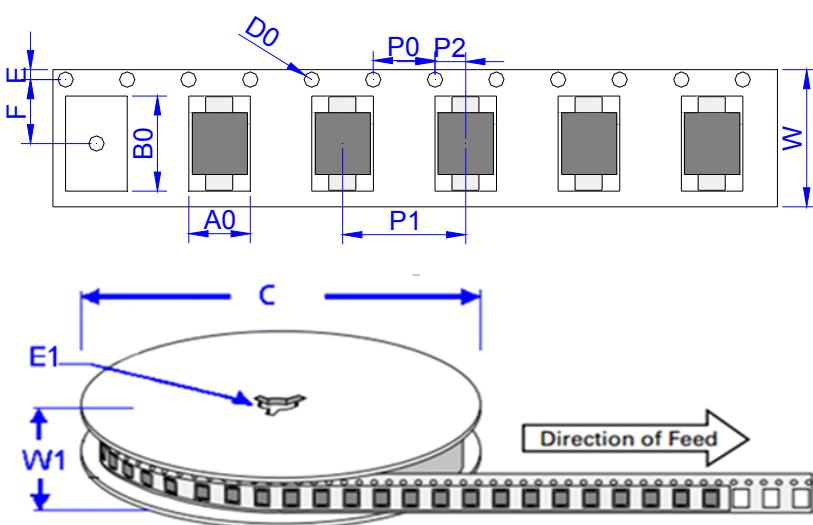

Ref.	Dimensions	
	Millimeters	Inches
A0	6.05 ± 0.3	0.238 ± 0.012
B0	8.31 ± 0.3	0.327 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	7.50 ± 0.2	0.295 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	16.0 ± 0.2	0.630 ± 0.008
W1	19.7 ± 2.0	0.776 ± 0.079

PART No.	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SM2KxxCC	0.294	3,000	48,000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the first version which is made in 4-Sept.-2020. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.